

Operating and installation instructions

Oven



To avoid the risk of accidents or damage to the appliance it is **essential** to read these instructions before it is installed and used for the first time.

Contents

Warning and Safety instructions	7
Caring for the environment	19
Oven overview	20
Oven controls	21
On/Off sensor ①	22
Function selector	22
Functions	22
Display	22
Symbols in the display	22
Rotary selector	23
Sensor controls	23
Features	26
Model numbers	26
Data plate	26
Items supplied	26
Accessories supplied and available to order	26
Side runners	27
Baking tray, universal tray and rack with non-tip notches	27
FlexiClip telescopic runners HFC72	28
Fitting and removing FlexiClip telescopic runners	28
Oven controls	32
Safety features	32
System lock  for the oven	32
Cooling fan	32
Vented oven door	32
Door lock - Pyrolytic cleaning	32
PerfectClean treated surfaces	33
Pyrolytic accessories	33
Using for the first time	34
Before using for the first time	34
Setting the time of day for the first time	34
Heating up the oven for the first time and rinsing the steam injection system	35
Settings	38
Altering the time of day	38
Changing factory default settings	39
System lock 	42
To activate the system lock	42

Deactivating the system lock for a cooking process	43
Deactivating the system lock	43
Minute minder 	44
Using the minute minder 	44
To set the minute minder	44
To change the duration set for the minute minder	45
To cancel the duration set for the minute minder	45
Overview of functions	46
Tips on saving energy	48
Operation	50
Simple operation	50
Cooling fan.	50
Recommended temperature	51
Changing the temperature	51
Temperature indicator light.	52
Pre-heating the oven	52
Switching on and off automatically	53
Setting the cooking duration.	53
Setting a cooking duration and finish time	54
At the end of the cooking duration	55
Changing the cooking duration	55
Deleting a cooking duration	56
Deleting a finish time	56
Moisture plus 	57
Moisture plus function 	58
Set the number of bursts of steam	58
Set the temperature	58
Preparing and starting the water intake process	59
Automatic burst of steam	60
Injecting bursts of steam manually	60
Residual water evaporation	61
The residual water evaporation process	61
To start residual water evaporation immediately	62
To cancel the residual water evaporation process.	63
Baking	64
Notes on the baking chart	65
Baking chart.	66

Contents

Roasting	70
Notes on the roasting chart	70
Roasting chart	72
Low temperature cooking	74
Grilling	76
Notes on the grilling chart	77
Grilling chart	79
Defrosting	80
Drying food	81
Frozen food/Ready meals	82
Gentle bake	83
Cleaning and care	84
Unsuitable cleaning agents	84
Tips	85
Normal soiling	85
Stubborn soiling (does not apply to the FlexiClip runners)	86
Pyrolytic cleaning  of the oven interior	87
Setting up for pyrolytic cleaning	87
Starting Pyrolytic cleaning	88
At the end of pyrolytic cleaning	89
If pyrolytic cleaning is cancelled	91
Removing the door	92
Dismantling the door	93
Refitting the door	97
Removing the side runners	98
Lowering the top heat/grill element	99
Descaling the steam injection system 	100
Sequence of a descaling cycle	100
Preparation	101
Carrying out the descaling process	102
Problem solving guide	105
After Sales / Guarantee	110
Electrical connection	111
Building-in diagrams	112
Appliance and niche dimensions	112
Front dimensions	114
Installing the oven	115

Recipes	116
Bake-off products	116
Bread rolls (frozen/part-baked, unchilled)/Salted pretzels (frozen)	116
Croissants	117
White bread	118
Flat bread	119
Herb bread	120
Olive bread	121
Sesame cheese rolls	122
Rye bread	123
Mixed grain bread	124
Yeast rolls	125
Seeded rolls	126
Italian mozzarella bread	127
Sunday rolls	128
Buttermilk bread	129
Chocolate breakfast rolls	130
Onion flat bread	131
Quark rolls	132
Buttermilk loaf	133
Malted pumpkin seed rolls	134
Yeast dough men	135
Yeast pretzels	136
Bacon or herb baguettes	137
Ham and cheese rolls	138
Apricot loaf	139
Butter cake	140
Pine nut and almond cake	141
Plaited walnut loaf	142
Cinnamon and macadamia ring	143
"Verduras" sea bream	144
Savoy cabbage and salmon gratin	145
Stuffed salmon trout	146
Viennese fillet of fish	147
Salmon and spinach pasta bake	148
Pollock delicioso	149
Trout stuffed with mushrooms	150
Pikeperch with herbs	151

Contents

Sweet and sour chicken	152
Turkey roulade with a spinach ricotta filling	153
Braised beef roulades	154
Braised silverside of veal	156
Glazed gammon	157
Stuffed pork tenderloin	158
Chinese pork steak	159
Spanish garlic rabbit	160
Lamb cutlets with a pistachio crust	161
Potato dumplings	162
Cheese soufflé	163
Spring pie	164
Cheese pie	165
Tortellini, ham and rocket bake	166
Mushroom cannelloni	167
Dumplings with plum compote	168
Sweet cherry soufflé	169
Note for test institutes	170
Test food acc. to EN 60350	170
Energy efficiency class	171
Product data sheets	171
Addresses	175

Warning and Safety instructions

This appliance complies with statutory safety requirements. Inappropriate use can, however, lead to personal injury and damage to property.

To avoid the risk of accidents and damage to the appliance, please read these instructions carefully before using it for the first time. They contain important notes on installation, safety, use and maintenance.

Miele cannot be held liable for non-compliance with these instructions.

Keep these instructions in a safe place and ensure that new users are familiar with the contents. Pass them on to any future owner.

Warning and Safety instructions

Correct application

- ▶ This oven is intended for use in domestic households and similar working and residential environments.
- ▶ The oven is not intended for outdoor use.
- ▶ It is intended for domestic use only to cook food, and in particular to bake, roast, grill, cook, defrost and dry food. Any other use is not supported by the manufacturer and could be dangerous.
- ▶ People with reduced physical, sensory or mental capabilities, or lack of experience or knowledge who are not able to use the appliance safely on their own must be supervised whilst using it. They may only use it unsupervised if they have been shown how to use it safely and recognise and understand the consequences of incorrect operation.

Safety with children

- ▶ Children under 8 years of age must be kept away from the appliance unless they are constantly supervised.
- ▶ Children 8 years and older may only use the oven unsupervised if they have been shown how to use it safely and recognise and understand the consequences of incorrect operation.
- ▶ Children must not be allowed to clean or maintain the appliance unsupervised.
- ▶ Please supervise children in the vicinity of the oven and do not let them play with it.
- ▶ Danger of suffocation. Packaging, e.g. plastic wrappings, must be kept out of the reach of babies and children. Whilst playing, children could become entangled in packaging or pull it over their head and suffocate.

Warning and Safety instructions

► Danger of burning.

Children's skin is far more sensitive to high temperatures than that of adults. External parts of the oven such as the door glass, control panel and the vents become quite hot during use. Do not let children touch the oven whilst it is in use.

► Danger of injury.

The oven door can support a maximum weight of 15 kg. Do not let children sit on the door, lean against it or swing on it.

► Danger of burning.

Children's skin is far more sensitive to high temperatures than that of adults. The oven gets hotter during pyrolytic cleaning than it does in normal use. Do not let children touch the oven whilst the Pyrolytic cleaning programme is running.

Technical safety

- ▶ Unauthorised installation, maintenance and repairs can cause considerable danger for the user. Installation, maintenance and repairs must only be carried out by a Miele authorised technician.
- ▶ Never use a damaged oven. It could be dangerous. Check it for visible signs of damage before using it.
- ▶ Reliable and safe operation of this oven can only be assured if it has been connected to the mains electricity supply.
- ▶ The electrical safety of this appliance can only be guaranteed when correctly earthed. It is essential that this standard safety requirement is met. If in any doubt please have the electrical installation tested by a qualified electrician.
- ▶ To avoid the risk of damage to the oven, make sure that the connection data on the data plate (voltage and frequency) match the mains electricity supply before connecting the oven to the mains. Consult a qualified electrician if in doubt.
- ▶ Do not connect the appliance to the mains electricity supply by a multi-socket unit or an extension lead. These do not guarantee the required safety of the appliance (fire hazard).
- ▶ For safety reasons, this appliance may only be used after it has been built in.
- ▶ The oven must not be used in a non-stationary location (e.g. on a ship).

Warning and Safety instructions

► Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults.

Never open the casing of the appliance.

► While the appliance is under guarantee, repairs should only be undertaken by a Miele authorised service technician. Otherwise the guarantee is invalidated.

► Miele can only guarantee the safety of the appliance when genuine original Miele replacement parts are used. Faulty components must only be replaced by Miele spare parts.

► If the connection cable is damaged or if the oven is supplied without a cable, it must be replaced or fitted with a special connection cable by a Miele authorised technician (see "Electrical connection").

► During installation, maintenance and repair work, the appliance must be disconnected from the mains electricity supply, e.g. if the oven lighting is faulty (see "Problem solving guide" and "Electrical connection").

Warning and Safety instructions

- ▶ In order to function correctly, the oven requires an adequate supply of cool air. Ensure that the supply of cool air is not impaired (e.g. by heat insulation strips in the housing unit). Please also ensure that the cool air supply is not unduly heated by other heat sources such as a solid fuel stove.
- ▶ If the oven is installed behind a furniture panel (e.g. a door), ensure that the door is never closed whilst the oven is in use. Heat and moisture can build up behind a closed furniture panel and cause subsequent damage to the oven, the housing unit and the floor. Do not close the door until the oven has cooled down completely.

Warning and Safety instructions

Correct use



Danger of burning.

The oven becomes hot when in use.

You could burn yourself on the heating elements, oven interior, cooked food or oven accessories.

Wear oven gloves when placing food in the oven, turning or removing it and when adjusting oven shelves etc. in a hot oven.

► Due to the high temperatures radiated, objects left near the oven when it is in use could catch fire.

Do not use the oven to heat up the room.

► Oil and fat can ignite if overheated. Never leave the oven unattended when cooking with oil and fat.

If it does ignite do not put the flames out with water. Switch the oven off immediately and then suffocate the flames by keeping the oven door closed.

► Grilling food for an excessively long time can cause it to dry out with the risk of catching fire.

Do not exceed recommended grilling times.

Warning and Safety instructions

- ▶ Some types of food dry out quickly and can self-ignite if high grill temperatures are used. Never use the grill to finish baking part-cooked rolls or bread or to dry flowers or herbs. Use Fan plus  or Conventional heat  for this type of procedure.
- ▶ If using alcohol in your recipes, please be aware that high temperatures can cause the alcohol to vaporise. The vapour can catch fire on hot heating elements.
- ▶ When using residual heat to keep food in the oven warm, the high moisture content and amount of condensation in the oven can cause corrosion damage. The control panel, the worktop or the housing unit can also suffer damage.
When using residual heat do not switch the oven off. Instead set the temperature to the lowest setting and leave the oven on the selected function. The fan will then remain on automatically and dissipate the moisture.
- ▶ Food which is stored in the oven or left in it to be kept warm can dry out and the moisture released can lead to corrosion damage in the oven. Always cover food that is left in the oven to keep warm.
- ▶ A build-up of heat can cause the enamel on the floor of the oven to crack or shatter.
Do not line the floor of the oven with anything, e.g. aluminium foil. Do not place roasting pans, pots or baking trays directly on the oven floor.
- ▶ The enamelling on the oven floor can become damaged by items being pushed around on it. If using the oven to store pots and pans, ensure that you avoid pushing them around on the oven floor.

Warning and Safety instructions

▶ If cold liquid is poured onto a hot surface steam will occur, which can cause scalding. The sudden change in temperature can also damage enamel surfaces.

Do not pour cold liquid directly onto hot enamelled surfaces.

▶ During cooking processes using moisture and during the residual moisture evaporation process steam is produced which can cause serious injury by scalding.

Do not open the door whilst a burst of steam is being released or during the evaporation process.

▶ It is important that the temperature in the food being cooked is evenly distributed and sufficiently high. Stir and / or turn it to ensure even heat distribution.

▶ Plastic containers which are not suitable for use in an oven can melt at high temperatures and can even damage the oven or catch fire.

Only use plastic containers which are declared by the manufacturer as being suitable for use in an oven. Follow the manufacturer's instructions on use.

▶ Do not heat up food in closed containers e.g. tins or sealed jars in the oven, as pressure will build up in the container, causing it to explode.

▶ You could injure yourself on the open oven door or trip over it. Avoid leaving the door open unnecessarily.

▶ The door can support a maximum weight of 15 kg.
Do not sit on or lean against an open door, and do not place heavy objects on it. Also make sure that nothing can get trapped between the door and the oven cavity. The oven could get damaged.

Cleaning and care

- ▶ Do not use a steam cleaning appliance to clean this appliance. The steam could reach electrical components and cause a short circuit.
- ▶ Scratches on the door glass can result in the glass breaking. Do not use abrasive cleaners, hard sponges, brushes or sharp metal tools to clean the door glass.
- ▶ The side runners can be removed for cleaning purposes (see "Cleaning and care"). Ensure that they are replaced correctly and do not use the oven without them fitted.
- ▶ Coarse soiling should be removed before running the Pyrolytic cleaning programme. If not removed, coarse soiling can smoke and cause the Pyrolytic cleaning programme to switch itself off.

Warning and Safety instructions

Accessories

► Only use genuine original Miele accessories and spare parts with this appliance. Using accessories or spare parts from other manufacturers will invalidate the guarantee, and Miele cannot accept liability.

► If you have a Miele HUB 5000-M, HUB 5001-M or a HUB 5000-XL oven dish, do not place it on Shelf level 1. This would damage the floor of the oven. The very small gap between the bottom of the dish and the oven floor would cause a build-up of heat and could cause the enamel to crack or chip. Never place a Miele oven dish on the top rail of Shelf level 1 as it will not be held securely in this position by the anti-tip notches on the runners. In general it is best to use Shelf level 2.

► The high temperatures used during pyrolytic cleaning will damage accessories that are not designed for cleaning in the Pyrolytic programme. Please remove these accessories from the oven interior before starting the Pyrolytic cleaning programme. This also applies to non-pyrolytic accessories purchased separately to the oven (see "Cleaning and care").


Disposal of the packing material

The packaging is designed to protect the appliance from damage during transportation. The packaging materials used are selected from materials which are environmentally friendly for disposal and should be recycled.

Recycling the packaging reduces the use of raw materials in the manufacturing process and also reduces the amount of waste in landfill sites.

Disposing of your old appliance


Electrical and electronic appliances often contain valuable materials. They also contain materials which, if handled or disposed of incorrectly, could be potentially hazardous to human health and to the environment. They are, however, essential for the correct functioning of your appliance. Please do not therefore dispose of it with your household waste.



Please dispose of it at your local community waste collection / recycling centre or contact your Dealer for advice.

Ensure that it presents no danger to children while being stored for disposal.


Oven overview

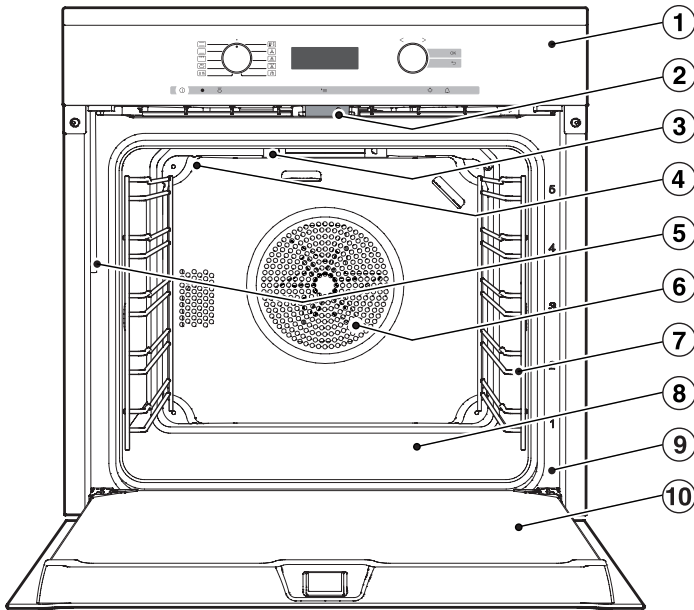

- ① Oven controls*
- ② Door lock - Pyrolytic cleaning
- ③ Top heat/grill element
- ④ Steam inlet openings
- ⑤ Water intake pipe for the steam injection system
- ⑥ Air inlet for the fan with ring heating element behind it
- ⑦ Side runners with 5 shelf levels
- ⑧ Oven floor with bottom heat element underneath it
- ⑨ Front frame with data plate
- ⑩ Door

* features will vary depending on model

Oven controls

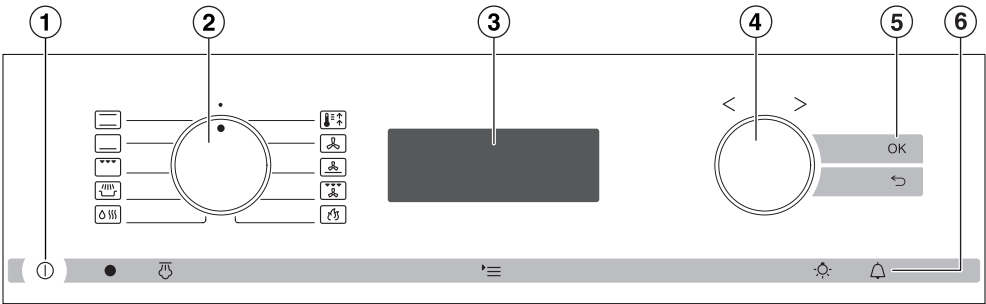

- ① On/Off sensor ①
- ② Function selector
- ③ Display
- ④ Rotary selector < >
- ⑤ OK, ↶ sensors
- ⑥ ⏻, ≡, ☀, 🔔 sensors

Oven controls

On/Off sensor ①

The On/Off sensor ① is recessed and reacts to touch.

It is used for switching the oven on and off.

Function selector

For selecting oven functions.


It can be turned clockwise or anti-clockwise and in the ● position, can be retracted by pressing it in.

Functions

-  Conventional heat
-  Bottom heat
-  Grill
-  Gentle bake
-  Moisture plus
-  Rapid heat-up
-  Fan plus
-  Intensive bake
-  Fan grill
-  Pyrolytic cleaning

Display

The display shows the time of day or your settings.

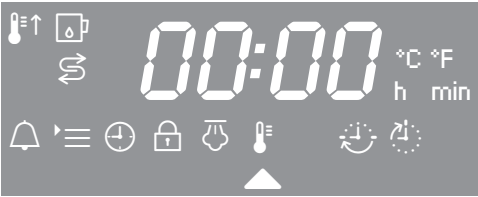

Symbols in the display

Depending on the position of the function selector ○ and/or whether a sensor has been touched, the following symbols appear:

Symbol/function	○
 Minute minder	Any
 Temperature indicator light	Function
 Duration	
 End of cooking duration	
 Temperature	
 Water intake process	Moisture-plus
 Descaling	
 Bursts of steam	
 Settings <i>P</i>	●
 Time of day	
 System lock	

You can only set or change a function if the function selector is in the correct position.

Rotary selector

Use the rotary selector < > to enter temperatures and durations.

Turning it clockwise will increase the values, and turning it anti-clockwise will decrease them.

It can also be used to highlight a function by moving the triangle ▲ in the display.

It can be turned clockwise or anti-clockwise. It can be retracted in any position by pressing it in.

Sensor controls

The OK, ↵, ⏹, ⏸, ⏶ and 🔔 sensors react to touch. Each touch is confirmed with a keypad tone.

This keypad tone can be switched off by changing setting *P 3* to Status *5 0* (see "Settings").

Oven controls

Sensor	Function	Notes
OK	For calling up functions and saving settings	Functions marked with triangle ▲ can be called up by touching OK. The selected function can be changed whilst triangle ▲ is flashing. Press OK to save the changes.
↶	To go back a step	
'≡	To call up a function	If the time of day is visible in the display and the rotary selector is at the ● position, the symbols for settings '≡, time of day ⌚ and system lock 🔒 will appear when the '≡ sensor is pressed. If the time of day display is switched off, the '≡ sensor will not react until the oven is switched on. During a cooking process temperature 🌡️, cooking duration ⌚ and finish 🔔 can be adjusted by touching this sensor.

Sensor	Function	Notes
	For switching the oven interior lighting on and off	If the oven is switched off but the time of day display is switched on, the oven interior lighting can be switched on and off by touching , for example, when cleaning the oven. If the time of day display is switched off, the  sensor will not react until the oven is switched on. The oven interior lighting switches off after 15 seconds during a cooking process or remains constantly switched on, depending on the setting selected.
	For setting the minute minder	If the oven is switched off but the time of day display is switched on, the minute minder time can be used to time any activity in the kitchen, e.g. when boiling eggs. If the time of day display is switched off, the  sensor will not react until the oven is switched on.
	For injecting the bursts of steam	If manual steam injection is selected in , the bursts of steam are injected by touching the  sensor. The  sensor lights up when a burst of steam can be injected.  appears in the display when a burst of steam is being injected.

Features

Model numbers

A list of the ovens described in these operating instructions can be found on the back page.

Data plate

The data plate is located on the front frame, visible when the door is open.

The data plate states the model number of your oven, the serial number as well as connection data (voltage, frequency and maximum connected load).

Please have this information to hand, should you need to contact Miele regarding any questions or problems.

Items supplied

The oven is supplied with:

- the operating and installation instructions for using the oven functions, with examples of recipes,
- screws for securing your oven in the housing unit,
- descaling tablets and a plastic tube with clip for descaling,
- various accessories.

Accessories supplied and available to order

Accessories will vary depending on model.

Your oven will be supplied with side runners, a universal tray and a rack. Depending on model, your oven may also come supplied with some or several of the accessories listed here.

All the accessories listed as well as the cleaning and care products are designed for Miele appliances.

These can be ordered via the internet at www.miele-shop.com, from Miele (see back cover for contact details) or from your Miele dealer.

When ordering, please quote the model number of your oven and give a description of the accessories required.

Side runners

Side runners for trays, racks and Miele oven dishes are fitted on either side of the oven cavity for shelf levels .

The numbers for the shelf levels are marked on the front frame.


Each level consists of two rails, one above the other.

- The accessories (e.g. the rack) are pushed into the oven between the rails,
- FlexiClip telescopic runners (depending on model) are fitted on the lower rail.


If necessary, the side runners can be removed for cleaning (see "Cleaning and care").

Baking tray, universal tray and rack with non-tip notches


Baking tray HBB71:



Universal tray HUBB71:



Rack HBBR72:



These accessories are inserted into the oven between the two rails of a side runner.

Always position the rack as illustrated above.


The accessories have non-tip safety notches half way along the short edges which prevent them from being pulled right out when they only need to be pulled partially out.



If you are using the universal tray with the rack on top, insert the tray between the rails of the side runners and the rack will automatically slide in above them.



Features

FlexiClip telescopic runners HFC72

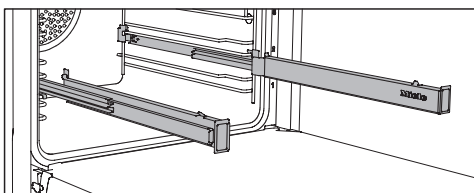

The FlexiClip telescopic runners can be used with any shelf level.

Push the FlexiClip telescopic runners right into the oven before placing accessories on them. The accessories will then automatically sit securely in between the stoppers at either end of each runner and be prevented from sliding off.

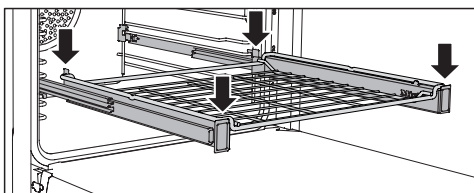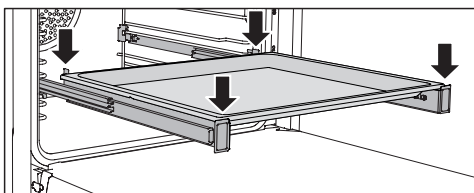

The FlexiClip runners can support a maximum load of 15 kg.


Fitting and removing FlexiClip telescopic runners

 Danger of burning.
Make sure the oven heating elements are switched off and cool.


The FlexiClip runners are fitted in between the two rails that make up a shelf level.

The FlexiClip runner with the Miele logo is fitted on the right.

When fitting the FlexiClip telescopic runners **do not** extend them.

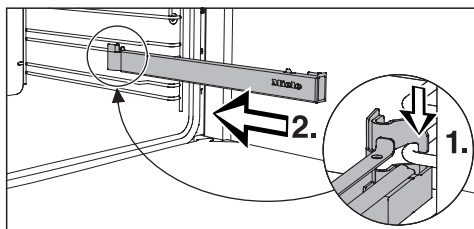

- Hook the FlexiClip runner onto the front of the lower rail of a side runner (1.) and then push it along the rail into the oven compartment (2.).

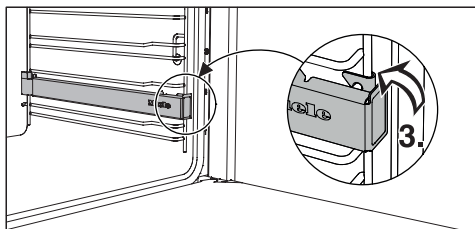


- Then secure the FlexiClip runner to the lower of the two rails as illustrated (3).

If the FlexiClip runners are difficult to pull out after fitting, you may need to pull firmly on them once to release them.


To remove a FlexiClip runner:

- Push the FlexiClip runner in all the way.

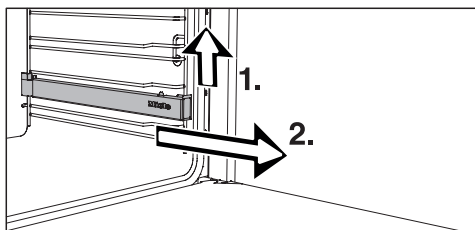

- Remove the FlexiClip runner by raising it at the front (1) then pulling it forwards along the rail and out (2).

Gourmet perforated baking tray, HBBL 71



The perforated baking tray has been specially designed for baking fresh yeast and quark dough items, bread and rolls.

The fine perforations help to brown the underside of food.

The tray can also be used for drying fruit and vegetables.

The enamelled surface has been treated with PerfectClean.

Anti-splash insert HGBB71




The anti-splash insert fits in the universal tray.

The juices from the food being grilled or roasted collect under the insert. This prevents them from spitting and making the oven dirty. The juices can then be used for making gravy and sauces.

The enamelled surface has been treated with PerfectClean.

Features


Round baking tray HBF 27-1



The round baking tray is suitable for cooking pizza, shallow cakes made with yeast or whisked mixtures, sweet and savoury tarts, baked desserts, flat bread, and can also be used for frozen cakes and pizzas.

The enamelled surface has been treated with PerfectClean.

Baking stone HBS 60



The baking stone is ideal for items which need a well baked base such as pizza, quiche, bread, bread rolls and savoury snacks.

The baking stone is made from heat retaining fire brick and is glazed. Place it directly on the rack.

A paddle made of untreated wood is supplied with it for placing food on the baking stone and taking it off.

HUB oven dishes and HBD oven dish lids

The Miele oven dishes, unlike other oven dishes, slide into the oven on the side runners. They have non-tip safety notches like the rack to prevent them being pulled out too far. They also have a non-stick coating.

Gourmet oven dishes are either 22 cm or 35 cm deep. The width and height are the same.

Lids are also available. These are ordered separately.


Please quote the model number of your Miele oven dish when ordering.

Depth: 22 cm

HUB5000-M
HUB5001-M*




HBD 60-22




Depth: 35 cm

HUB5000-XL




HBD 60-35




* suitable for use on induction hobs

Handle HEG



The handle makes it easier to take the universal tray, baking tray and rack out of the oven, or to put them into it. The two prongs at the top go inside the tray or above the rack, and the U-shape supports underneath.

Descaling tablets, plastic tube with suction cup



These are required for descaling the appliance.

Miele microfibre cloth

Light soiling and fingerprints can be easily removed with the microfibre cloth.

Miele oven cleaner

Miele oven cleaner is suitable for removing very stubborn soiling. It is not necessary to pre-heat the oven beforehand.

Features

Oven controls

In addition to operating the various cooking functions for baking, roasting and grilling, the oven controls are also used to operate

- the time of day display,
- a minute minder,
- a timer to automatically switch cooking programmes on and off,
- Moisture plus cooking,
- settings that can be customised.

Safety features

System lock for the oven

The system lock prevents the oven from being used unintentionally (see "System lock ").

The system lock will remain activated even after an interruption to the power supply.

Cooling fan

A cooling fan will come on automatically when a cooking programme is started. The cooling fan mixes hot air from the oven cavity with cool room air before venting it out into the kitchen through vents located between the appliance door and the control panel.

The cooling fan will continue to run for a while after a programme to prevent moisture building up in the oven, on the control panel or in the oven housing unit.

When the temperature in the oven has fallen sufficiently, the cooling fan will switch off automatically.

Vented oven door

The oven door glass panes have a heat-reflecting coating.

When the oven is operating, air is passed through the door to keep the outer pane cool.

The door can be removed and dismantled for cleaning (see "Cleaning and care").

Door lock - Pyrolytic cleaning

For safety reasons the door is locked as soon as the Pyrolytic cleaning programme is started. After the Pyrolytic cleaning programme has finished, the door will remain locked until the temperature in the oven has fallen below 280 °C.

PerfectClean treated surfaces

PerfectClean surfaces have very good non-stick properties and are much easier to keep clean than conventional enamel surfaces, if cleaned regularly.

Food can be taken off these surfaces easily, and soiling from baking and roasting is simple to remove.

Food can be sliced or cut up on PerfectClean surfaces.

However, do not use ceramic knives as these will scratch the PerfectClean surface.

Surfaces treated with PerfectClean enamel can be cleaned as you would clean glass.

Read the instructions in "Cleaning and care" so that the benefits of the non-stick properties and easy cleaning are retained.

The following have all been treated with PerfectClean:

- Universal tray
- Baking tray
- Anti-splash insert
- Perforated baking tray
- Round baking tray

Pyrolytic accessories

The following accessories can be left in the oven during the pyrolytic cleaning programme.

- Side runners
- FlexiClip telescopic runners
- Rack

See "Cleaning and care" for more information.

Using for the first time

Before using for the first time

 The oven must not be operated until it has been correctly installed in its housing unit.

- Press and release the function and rotary selectors if they are retracted.


The time of day can only be changed when the function selector is at ●.

- Set the time of day

Setting the time of day for the first time

The time of day is shown in 24 hour clock format.

After connecting the oven to the electricity supply, **12:00** will appear in the display and the triangle ▲ will flash under .

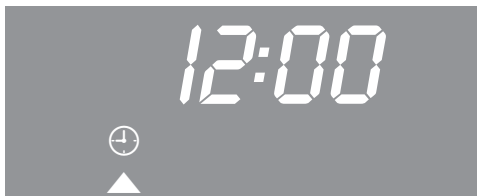

- Use the rotary selector to enter the time of day.
- Touch the OK sensor.

The time of day is now saved.

The time of day can be displayed in 12 hour format by setting **P 4** in the settings menu to status **12h** (see "Settings").

In the event of a power cut the time of day is saved for approx. 200 hours. If power is restored within this time the current time of day is displayed.

After a longer power cut, the time of day needs to be re-entered.

The time of day display is switched off by default (see "Settings – P 1"). The display appears dark if the oven is switched off. The time of day continues to run unseen in the background.

Heating up the oven for the first time and rinsing the steam injection system

New ovens can give off an unpleasant smell on first use. Heating up the oven for at least 1 hour with nothing in it will get rid of this smell. It is a good idea to rinse the steam injection system at the same time.

Ensure that the kitchen is well ventilated during this operation. Close doors to other rooms to prevent the smell spreading throughout the house.

- Remove any stickers or protective foil from the oven and accessories.
- Before heating the oven up, wipe the interior with a damp cloth to remove any dust or bits of packaging that may have accumulated in the oven cavity during storage and unpacking.
- Fit the FlexiClip runners (available to order) to the side runners and insert all trays and the rack.
- Fill a container with approx. 150 ml of fresh tap water.
- Switch the oven on.

- Select the Moisture plus  function.

The lighting will come on.

Auto will appear in the display and the triangle ▲ will flash under :



- Touch the OK sensor.

The recommended temperature will appear in the display with the triangle ▲ flashing under :




- Use the rotary selector to set the maximum possible temperature (250 °C).
- Touch OK or wait approx. 15 seconds. The setting will then be automatically saved.

Using for the first time

The prompt for water intake appears and the triangle ▲ flashes:



- Open the door.
- Pull the water intake pipe forwards (located below the control panel on the left).

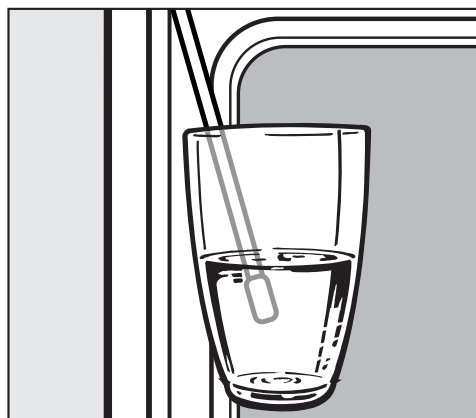

- Immerse the end of the water intake pipe in the container with tap water.

- Touch the OK sensor.

The water intake process will begin.

The amount of water required will be drawn up into the oven. The quantity of water specified is higher than actually required, leaving a small amount in the container.

- Remove the water container after the water intake process.
- Close the door.

You will hear the pump briefly as the remaining water in the water intake pipe is drawn into the oven.

The oven heating will switch on.

After a short time a burst of steam is injected automatically.

 Danger of injury. Steam can cause injury by scalding. Do not open the appliance door while a burst of steam is being injected.

Heat the empty oven for at least an hour.

After at least an hour:

- Turn the function selector to ●.

After heating up for the first time

 Danger of burning. Allow the oven interior to cool down before cleaning by hand.

- Touch , to switch on the oven interior lighting.
- Take all accessories out of the oven and clean them by hand (see "Cleaning and care").
- Clean the oven interior with a clean sponge and a solution of hot water and washing-up liquid or a damp microfibre cloth.
- Dry all surfaces with a soft cloth.
- Switch the interior lighting and the oven off.

Leave the oven door open until the oven interior is completely dry.

Settings

Altering the time of day

The time of day can only be changed when the function selector is at ●.

- Touch '≡.
- Use the rotary selector to move the ▲ triangle until it appears under ⊕.
- Touch the OK sensor.

The triangle ▲ will flash under ⊕.

- Use the rotary selector to enter the time of day.
- Touch the OK sensor.

The time of day is now saved.

In the event of a power cut the time of day is saved for approx. 200 hours. If power is restored within this time the current time of day is displayed.

After a longer power cut, the time of day needs to be re-entered.

Changing factory default settings

Settings can only be changed when the oven is switched on and the rotary selector is at ●.

Your appliance is supplied with a number of standard default settings (see the "Settings overview" chart).

A setting is changed by altering its status.

- Touch '≡.
- If necessary use the rotary selector to move the triangle ▲ until it appears under '≡.



- Touch the OK sensor.

P 1 will appear:



- If you wish to change another setting, use the rotary selector to select the appropriate number.
- Touch the OK sensor.



The setting is selected and the current status appears, e.g. 5 0.

To alter the status:

- Use the rotary selector to select the status you want.
- Touch the OK sensor.

The selected status is saved and the setting appears again.

If you wish to alter more settings, proceed as described previously.

Touch ↩ to skip one setting and change another.

- Press '≡ if you do not want to change any more settings.

The settings remain in the memory even after a power cut.

Settings

Settings overview

Setting	Status
<i>P 1</i> Time of day display	<i>5 0</i> * The time of day display is switched off . The display is dark when the oven is switched off. The time of day continues to run unseen in the background. If you have selected status <i>5 0</i> , the oven must be switched on before it can be used. This also applies for the minute minder  and lighting  . The oven also switches off automatically if no settings are selected within a certain period of time (approx. 30 minutes). <i>5 1</i> The time of day display is switched on and is visible in the display.
<i>P 2</i> Buzzer volume	<i>5 0</i> The buzzer is switched off . <i>5 1</i> to <i>5 XX</i> ** The buzzer is switched on . * The volume can be altered. When you select a status you will hear the corresponding buzzer.
<i>P 3</i> Keypad tone	<i>5 0</i> Keypad tone deactivated . <i>5 1</i> * Keypad tone activated .
<i>P 4</i> Clock format	<i>24h</i> * The time of day is shown in 24 hour format. <i>12h</i> The time of day is shown in 12 hour format. If you change the clock after 13:00 from a 12 hour clock to a 24 hour clock you will need to update the hour numerical block for the clock accordingly.

* Factory default setting

** Depending on model

Setting	Status
P 5 Temperature units	°C * The temperature is displayed in degrees Celsius . °F The temperature is displayed in degrees Fahrenheit .
P 6 Display brightness	5 1 to You can choose different levels of brightness for 5 7, the display. 5 4 * 5 1 minimum brightness 5 7 maximum brightness.
P 7 Lighting	5 0 * The oven interior light is switched on for 15 seconds and then switches off automatically. 5 1 The oven interior light is switched on constantly .
P 8 Demo mode	5 0 * Select 5 0 and touch OK for approx. 4 seconds. If ---- appears briefly, demo mode is deactivated . 5 1 Select 5 1 and touch OK for approx. 4 seconds. If DES_ appears briefly, demo mode is activated . The oven can be operated but will not heat up and the steam injection system pump will not work. Do not activate this setting for domestic use.

* Factory default setting

System lock

The system lock  prevents the oven from being used unintentionally, for example by children.

The oven is delivered with the system lock deactivated.

The setting for the system lock can be changed by altering its status 5:

- 5 0 = off
- 5 1 = on

To activate the system lock

The status of the system lock can only be altered when the oven is switched on and the rotary selector is at ●.

- Touch '≡.
- Use the rotary selector to move the triangle ▲ until it appears under .



- Touch the OK sensor.

The currently set status 5 0 appears:



- Use the rotary selector to select status 5 1.



- Touch the OK sensor.
- Touch '≡.

The current time of day will appear.

- Switch the oven off.


When the appliance is switched on again the  symbol will appear in the display to remind you that the system lock has been activated.

The system lock will remain activated even after an interruption to the power supply.

Deactivating the system lock for a cooking process

- Switch the oven on.

The  and  symbols and the current time of day will appear:

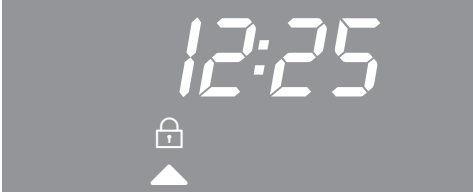

- Touch OK until  goes out.

The oven can now be used.

Deactivating the system lock

The status of the system lock can only be altered when the oven is switched on and the rotary selector is at ●.

- Switch the oven on.
- Touch OK until  goes out.
- Touch '≡'.
- Use the rotary selector to move the triangle  until it appears under .

- Touch the OK sensor.

The currently set status **S 1** appears.

- Use the rotary selector to set status **S 0**.
- Touch the OK sensor.
- Touch '≡'.

The system lock is switched off.

The  symbol disappears.

Minute minder

Using the minute minder

The minute minder can be used to time other activities in the kitchen, e.g. boiling eggs.

The minute minder can also be used at the same time as a cooking programme in which the start and finish times have been set, e.g. as a reminder to stir a dish or add seasoning etc.

A maximum minute minder duration of 99 minutes and 55 seconds can be set.

Tip: Use the minute minder when using Moisture plus  to remind you to inject the bursts of steam at the desired time.

To set the minute minder


Example:

You want to boil some eggs and set a minute minder duration of 6 minutes and 20 seconds.


If you have selected the setting "P 1 – 5 0" for the time of day display, you will need to switch the oven on before you can set a minute minder duration.

- Touch .

00:00 will appear in the display with the triangle  flashing under .

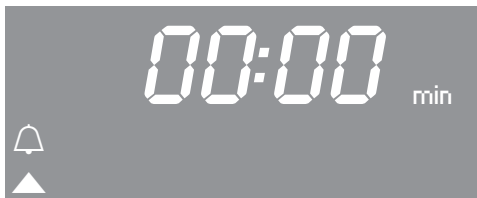


- Use the rotary selector to set the minute minder duration you require.

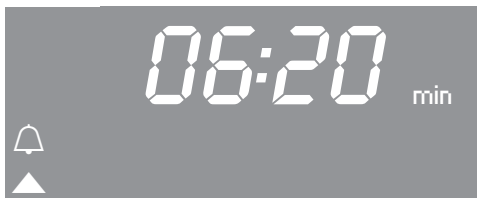

- Touch the OK sensor.

The minute minder is saved and will count down in seconds.

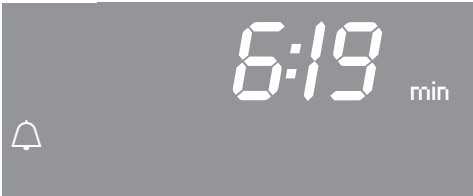

The  symbol indicates the minute minder has been set.

At the end of the minute minder duration

-  will flash,
 - the display will show the time counting upwards,
 - a buzzer will sound three times if this option is selected (see "Settings – P 2").
- Touch .

The buzzer will stop and the symbols in the display will go out.

To change the duration set for the minute minder

- Touch .

The minute minder duration selected appears.

- Use the rotary selector to set the minute minder duration.
- Touch the OK sensor.

The changed minute minder duration is saved and will count down in seconds.

To cancel the duration set for the minute minder

- Touch .

- Use the rotary selector to reduce the minute minder duration to **00:00**.
- Touch the OK sensor.

The minute minder duration is now cancelled.

Overview of functions

Your oven has a range of oven functions for preparing food.

Depending on the function selected, different heating elements are switched on and sometimes combined with the fan (see details in brackets).

Conventional heat

(Top heat/grill element + bottom heat element)

For baking and roasting traditional recipes, preparing soufflés and cooking at low temperatures.

If using an older recipe or cookbook, set the oven temperature 10 °C lower than that recommended. This will not change cooking times.

Bottom heat

(Bottom heat element)

Use this setting towards the end of cooking to brown the base of a cake, quiche or pizza.

Grill

(Top heat/grill element)

For grilling larger quantities of thin cuts (e.g. steaks) and browning baked dishes.

Moisture plus

(Ring heat element + fan + steam injection system)

For baking and roasting with moisture injection.

Rapid heat-up

(Top heat/grill element + ring heat element + fan)

For pre-heating the oven quickly. The oven function required must then be selected.

Fan plus

(Ring heat element + fan)

This function is used for baking and roasting on different levels at the same time.

A lower temperature can be selected than when using Conventional heat , as the fan distributes the heat to the food straight away.

Intensive bake

(Ring heat element + fan + bottom heat element)

For baking cakes with moist toppings. Intensive bake is not suitable for baking thin biscuits or for roasting as the juices will become too dark.

Fan grill

(Top heat/grill element + fan)

For grilling thicker cuts of meat (e. g. roulades, chicken). Lower temperatures can be used than when using the Grill  function, as the fan distributes the heat to the food straight away.

Gentle bake

(Top heat/grill element + ring heat element + fan)

For cooking meat.

Tips on saving energy

Cooking

- Remove any accessories from the oven that you do not require for cooking.
- Pre-heat the oven only if instructed to do so in the recipe or the cooking chart.
- Avoid opening the door during cooking.
- In general, if a range of temperatures is given, it is best to select the lower temperature and to check the food after the shortest given time.
- It is best to use dark baking tins and containers with a matt finish made from non-reflective materials (enamelled steel, oven-proof glassware, non-stick coated cast aluminium). Shiny materials such as stainless steel or aluminium reflect heat, preventing it reaching the food efficiently. Do not cover the oven floor or the rack with heat-reflective aluminium foil.
- Observe cooking durations to avoid energy wastage when cooking food.

Wherever possible set the cooking duration, or use a food probe.
- Fan plus  can be used for cooking many types of food. Because the fan distributes the heat to food straight away it allows you to use a lower temperature than you would with Conventional heat . It also enables you to cook on several shelf levels at the same time.
- Fan grill  can be used for a wide variety of food. With Fan grill you can use lower temperatures than with other grill functions which use the maximum temperature setting.
- Whenever possible you should cook several dishes at the same time. Place them next to each other in the oven or on different shelf levels.
- Dishes which you are unable to prepare at the same time should, if possible, be cooked one after the other in order to make use of existing heat in the oven.

Using residual heat

- The temperature in cooking programmes using temperatures above 140 °C which take longer than 30 minutes to cook can be turned down to the lowest possible temperature about 5 minutes before the end of cooking in order to make use of residual heat. The cooling fan and, depending on cooking function the hot air fan, will remain on. Do not switch the oven off (see "Safety instructions").
- If you wish to run the pyrolytic cleaning programme, it is best to start it immediately after a cooking programme. The residual heat in the oven will help reduce the amount of energy required to run the programme.

Settings

- Switch the clock display off if you wish to reduce energy usage (see "Settings").
- Set the oven lighting so that it switches off automatically during a programme after 15 seconds. It can be switched on again at any time by touching .

Energy save mode

- The oven will switch itself off automatically to save energy if a programme is not being run and controls have not been operated. The time of day will appear in the display or the display will remain dark (see "Settings").

Operation

Simple operation

- Switch the oven on.
- Place the food in the oven.
- Select the required oven function with the function selector.

The recommended temperature will appear:



The oven heating, lighting and cooling fan will switch on.

- Use the rotary selector to change the temperature if necessary.

The current temperature and temperature indicator light  will appear after a short time:



You will see the temperature increasing. A buzzer will sound when the oven temperature is reached if this option is selected (see "Settings **P 2**").

After cooking:

- Turn the rotary selector to the ● position.
- Take the food out of the oven.
- Switch the oven off.

Cooling fan

The cooling fan will continue to run for a while after a cooking process to prevent moisture building up in the oven, on the control panel or on the oven housing unit.

The cooling fan will switch off automatically when the temperature in the oven interior has fallen sufficiently.

Recommended temperature

As soon as a cooking function is selected, a recommended temperature will appear in the display.


	Recommended temperature	Temperature range
	160 °C	30–250 °C
	170 °C	50–250 °C
	160 °C *	130–250 °C
	180 °C	30–280 °C
	190 °C	100–250 °C
	200 °C	100–260 °C
	240 °C	200–300 °C
	190 °C	100–250 °C
	160 °C	100–250 °C

* First *Auto* will appear in the display and the triangle ▲ will flash under the  symbol. The recommended temperature will only appear after the number of bursts of steam has been selected.

Changing the temperature

Example:

You have selected Fan plus  and 170 °C and can see the temperature increasing.

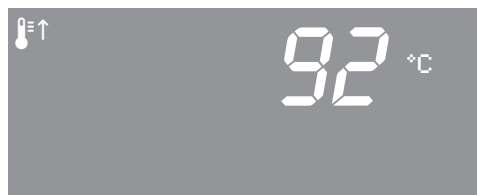

You want to reduce the target temperature to 155 °C.

- Use the rotary selector to reduce the temperature.

The triangle will flash under the temperature symbol and the temperature is altered in 5 °C-steps.



The altered target temperature is saved. The actual temperature is displayed.

Touch  to change between displaying the current and target temperatures.

Operation

Temperature indicator light

The temperature indicator light  lights up whenever the oven heating is switched on.

As soon as the set temperature is reached,

- a buzzer will sound, if this option is selected (see "Settings – P 2").
- the temperature indicator light will go out ,
- the oven heating switches off.

The temperature control unit ensures that the oven heating and the temperature indicator light switch back on if the temperature in the oven temperature falls below the level set.

Pre-heating the oven

It is only necessary to pre-heat the oven in a few instances.

Most dishes can be placed in a cold oven. They will then make use of the heat produced during the heating-up phase.

Pre-heat the oven when cooking the following food with the following oven functions:

Fan plus

- dark bread dough,
- beef sirloin joints and fillet.

Conventional heat

- cakes and biscuits with a short baking time (up to 30 minutes)
- delicate mixtures (e.g. sponges)
- dark bread dough,
- beef sirloin joints and fillet.

Rapid heat-up

With Rapid heat-up  the heating up phase can be shortened.

Do not use Rapid heat-up  to pre-heat the oven when baking pizzas or biscuits and small cakes. They will brown too quickly on top.

- Select Rapid heat-up .
- Select a temperature.
- When the temperature indicator light  goes out for the first time, set the oven function you require for continued cooking.
- Place the food in the oven.

Switching on and off automatically

Cooking programmes can be switched off, or on and off automatically.

To do this, set a duration or a duration and finish time after selecting an oven function and a temperature.

The maximum duration which can be set for a cooking programme is 12 hours.

We recommend switching on and off automatically when roasting.

If using it for baking, do not delay the start for too long as the cake mixture or dough will dry out, and the raising agents will lose their effectiveness.

Setting the cooking duration

Example: To bake a cake for 1 hour 5 minutes

- Place the food in the oven.
- Select the required oven function and the temperature.

The oven heating, lighting and cooling fan will switch on.


- Touch '≡'.



- If necessary, use the rotary selector to move the triangle ▲ until it appears under the circular arrow icon.

- Touch the OK sensor.

00:00 h will appear in the display with the triangle ▲ flashing under the circular arrow icon.

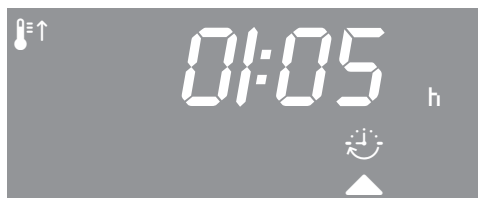

- Use the rotary selector to set the cooking duration (01:05).
- Touch the OK sensor.

The cooking duration is saved and then counts down in minutes, with the last minute counting down in seconds.

The circular arrow icon indicates a cooking duration has been set.

Operation

Setting a cooking duration and finish time

Example:

The time is now 11:15 ;
you want a dish with a cooking duration of 90 minutes to be ready by 13:30 .

- Place the food in the oven.
- Select the required oven function and the temperature.

The oven heating, lighting and cooling fan will switch on.

Set the cooking duration first:

- Touch '≡'.
- If necessary, use the rotary selector to move the triangle ▲ until it appears under ☹️.
- Touch the OK sensor.

00:00 h will appear in the display with the triangle ▲ flashing under ☹️.

- Use the rotary selector to set the cooking duration (01:30).
- Touch the OK sensor.


The cooking duration is saved and then counts down in minutes:



Now set the finish time:


- Use the rotary selector to move the triangle ▲ until it appears under ☹️.

12:45 will appear:

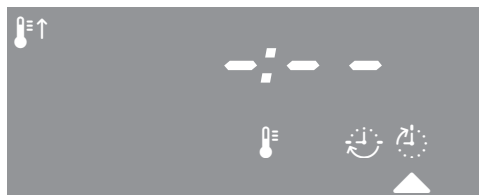


- Touch the OK sensor.

As soon as you turn the rotary selector clockwise 12:45 will appear in the display (= current time of day + cooking duration = 11:15 + 1:30):

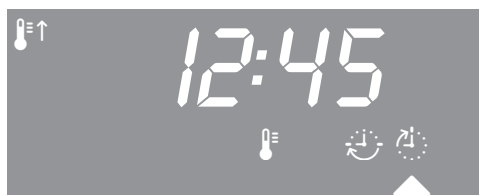

- Use the rotary selector to enter the cooking duration finish time (13:30).
- Touch the OK sensor.

The finish time  is now saved.

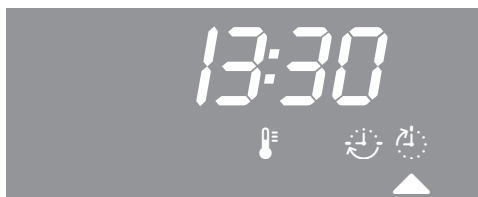

The oven heating, lighting and cooling fan will switch off.

As soon as the start time (*13:30 - 1:30 = 12:00*) is reached, the oven heating, lighting and cooling fan will switch on.

At the end of the cooking duration

- 0:00 will appear
-  will start to flash,
- the oven heating and lighting will switch off,
- the cooling fan will continue to run for a while,
- a buzzer will sound three times if this option is selected (see "Settings – P 2").

- Turn the function selector to ●.
- Switch the oven off.
- Take the food out of the oven.

If the dish is not cooked to your satisfaction you can prolong the cooking duration by entering a new duration.

Changing the cooking duration

- Touch .
- If necessary, use the rotary selector to move the triangle ▲ until it appears under .

The cooking duration remaining will appear in the display.

- Touch the OK sensor.
- Use the rotary selector to alter the cooking duration.
- Touch the OK sensor.

The altered cooking duration is now saved.

Operation

Deleting a cooking duration

- Touch '≡.
- If necessary, use the rotary selector to move the triangle ▲ until it appears under ☺.

- Touch the OK sensor.

The triangle ▲ will flash under ☺.

- Use the rotary selector to set the cooking duration to 0:00.

- Touch the OK sensor.

The cooking duration and any finish time will be deleted.

- Touch '≡.

The current temperature will appear.
The oven heating remains switched on.

If you want to finish the cooking programme:

- Turn the function selector to ●.
- Take the food out of the oven.

If you turn the function selector to ● or switch the oven off, the settings for the cooking duration and the finish time will be deleted.

Deleting a finish time

- Touch '≡.
- If necessary use the rotary selector to move the triangle ▲ until it appears under ☺.

- Touch the OK sensor.

The triangle ▲ will flash under ☺.

- Use the rotary selector to set the finish time to - -: -.

- Touch the OK sensor.

The cooking duration finish time is now deleted.

Your oven is equipped with a steam injection system for cooking with moisture. Baking, roasting and cooking with Moisture plus  guarantees optimised steam and air conduction for excellent cooking and browning results.

After selecting Moisture plus  you need to set the number of bursts of steam.

The options are:

- Automatic burst of steam ()
This requires enough water for one burst of steam. The burst of steam will be injected into the oven automatically after the heating-up phase.
- 1 burst of steam (1)
2 bursts of steam (2)
3 bursts of steam (3)
You need to have the appropriate amount of water ready.

First set the temperature and start the water intake process. Water is taken in via the tube underneath the control panel on the left.

 Use only fresh tap water when cooking with the Moisture plus function. Other liquids will cause damage to the oven.

The water is then injected as bursts of steam into the oven compartment during the cooking programme. The steam inlets are located at the rear left corner of the roof of the oven.

One burst of steam takes approx. 5–8 minutes. The number of bursts of steam and when they are injected will depend on the type of food being cooked:

- **Yeast mixtures** will rise better if steam is injected at the beginning of the programme.
- **Bread and rolls** also rise better if exposed to steam at the start. Injecting a burst of steam at the end of the programme will give the bread and rolls a glistening crust.
- When **roasting meat with a high fat content** injecting steam at the beginning of roasting will help render the fat.

Moisture plus is not suitable for mixtures which contain a lot of moisture, such as choux pastry and meringues, as the addition of steam does not allow them to dry out sufficiently.

Tip: Please refer to the sample recipes.

Moisture plus

Moisture plus function

It is quite normal for condensation to form on the inside of the door during steam injection. This will dissipate during the course of the cooking programme.

- Prepare the food and place in the oven.
- Fill a suitable container with the quantity of water specified:

<i>Auto</i> :	approx. 100 ml
<i>1</i> :	approx. 100 ml
<i>2</i> :	approx. 200 ml
<i>3</i> :	approx. 300 ml
- Select the Moisture plus  function.

Set the number of bursts of steam

Tip: Please refer to the sample recipes.

Auto will appear in the display and the triangle ▲ will flash under .



The other steam burst options (*1*, *2*, *3*) can be selected using the rotary selector.

After *3*, *E* is displayed.

This option starts the descaling process (see "Descaling the steam injection system ").

If you wish the burst of steam to be injected into the oven automatically after the heating-up phase:

- Select *Auto*.

If you wish to inject one or more bursts of steam manually at specific times:

- Select *1*, *2* or *3*.
- Touch the OK sensor.

Set the temperature

The recommended temperature will appear in the display and the triangle ▲ will flash under .




- If necessary, set the temperature using the rotary selector.
- Touch the OK sensor.

Preparing and starting the water intake process

The prompt for the water intake process will appear. The triangle ▲ will flash under .



- Open the door.
- Pull the water intake pipe forwards (located below the control panel on the left).

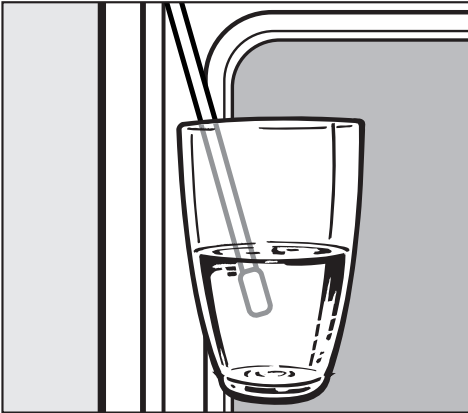

- Immerse the end of the water intake pipe in the container with tap water.
- Touch the OK sensor.

The water intake process will begin.

The amount of water actually drawn up into the oven may be less than the amount specified as required, leaving a small amount in the container.


The water intake process can be interrupted and restarted at any time by touching OK.

- Remove the water container after the water intake process.
- Close the door.

You will hear the pump briefly as the remaining water in the water intake pipe is drawn into the oven.

The appliance begins to heat up.

The current temperature and the temperature indicator  will appear.

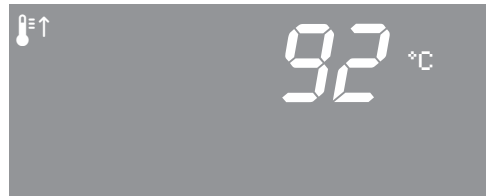

You will see the temperature increasing. A buzzer will sound when the oven temperature is reached if this option is selected (see "Settings - P 2").

Moisture plus

Steam can cause injury by scalding.
Do not open the door while the burst of steam is being injected.
Condensation on the sensors will make them react more slowly.

Automatic burst of steam

Once the heating-up phase has been completed, the automatic burst of steam is injected.

The following will appear in the display:



The water will vaporise in the oven compartment.

After the burst of steam,  will go out and the temperature will be displayed.

- Continue cooking until the end of the cooking duration.

Injecting bursts of steam manually

The bursts of steam can be injected as soon as  lights up in the display.

Please wait until the heating-up phase is completed to allow the steam to be distributed evenly by the warm air in the oven.

Please refer to the recipes for the timing of the bursts of steam.

Tip: Set the minute minder  to remind you.

- Touch  to inject the burst of steam.

The sensor light goes out and the following appears in the display:



- Proceed as described to inject further bursts of steam.

After the last burst of steam  will go out and the temperature will be displayed.

- Continue cooking until the end of the cooking duration.

Residual water evaporation

When cooking using the Moisture plus  function, the water will be equally distributed between the number of bursts of steam and used up as long as the programme is not interrupted.

However, if a programme using steam injection is interrupted before all the bursts of steam have been injected, the water for these unused bursts of steam will remain in the system.

The next time the Moisture plus  function is selected, a time will appear and triangle ▲ will flash under the  symbol to prompt you to evaporate the residual moisture.

The time shown in the display will depend on the amount of residual water in the system.

It is best to start the evaporation of residual water straight away so that only fresh water is used during a cooking programme.

The residual water evaporation process

The oven will heat up and the residual water in the oven cavity will evaporate.

Depending on the amount of water this can take up to approximately 30 minutes.

Steam can cause scalding injuries.
Do not open the door during the evaporation process.

During the evaporation process moisture will condense on the door and the oven interior.
This condensation must be wiped off after the oven has cooled down.

Moisture plus

To start residual water evaporation immediately

- Select the Moisture plus  function.


A time, depending on the amount of residual water present, will appear and the triangle ▲ will flash under :



- Touch the OK sensor.

The evaporation process will begin. The duration will count down in the display.

During the evaporation process, the duration may be adjusted by the system according to the amount of water currently present.

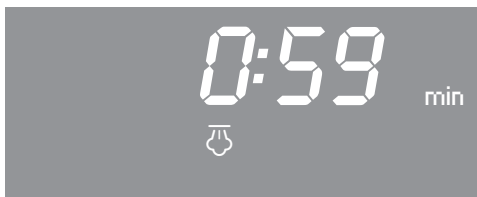

The last minute counts down in seconds.

At the end of the residual water evaporation process **Auto** appears:




A cooking process using the Moisture plus function  can now be carried out.

To cancel the residual water evaporation process

 Do not cancel the prompt for residual moisture evaporation too often, as this might cause the steam unit to overflow into the oven interior when taking in more water.


- Select the Moisture plus  function.

A time, depending on the amount of residual water present, will appear and the triangle ▲ will flash under the  symbol in the display:

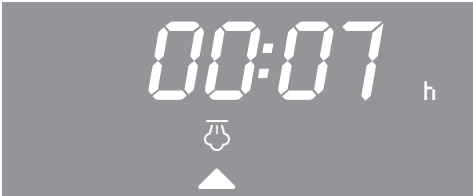

- Turn the rotary selector anti-clockwise

The time will be set to 00:00:

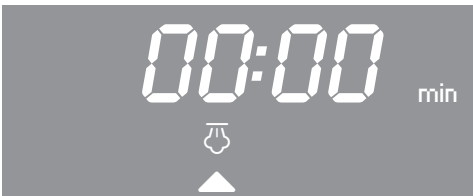

- Touch the OK sensor.

Auto appears in the display.



A cooking process using the Moisture plus function  can now be carried out.

Baking

Eating food which has been cooked correctly is important for good health.

Only bake cakes, pizza, chips etc. until they are golden. Do not overcook them.

Functions

Depending on how the food is prepared, you can use Fan plus , Intensive bake , Moisture plus  or Conventional heat .

Bakeware

The choice of bakeware depends on the oven function.

- Fan plus , Intensive bake , Moisture plus :
Baking tray, universal tray, bakeware of any ovenproof material.
- Conventional heat :
Dark baking tins with a matt finish. Avoid using bright, shiny metal tins as they give an uneven and poor browning result and in some cases cakes might not cook properly.

- Always place baking tins on the rack. Position rectangular tins with the longer side across the width of the rack for optimum heat distribution and even baking results.
- When baking cakes with fresh fruit toppings and deep sponge cakes place the tin in the universal tray to catch any spillages.

Baking paper, greasing the tin

Miele accessories, e. g. the universal tray are treated with PerfectClean enamel (see "Features").

Surfaces treated with PerfectClean enamel generally do not need to be greased or covered with baking paper.

Baking paper is only needed with

- anything with a high salt content (e.g. pretzels, bread sticks), because sodium can damage the PerfectClean surface,
- meringues or sponges with a high egg-white content, because they are more likely to stick,
- frozen food cooked on the rack.

Notes on the baking chart

Temperature

As a general rule, select the lower temperature given in the chart.

Baking at temperatures higher than those recommended may reduce the cooking time, but will lead to uneven browning, and unsatisfactory cooking results.

Baking duration

Check if the food is cooked at the end of the shortest time quoted.

To check if a cake is ready, insert a wooden skewer into the centre. It is ready if the skewer comes out clean, without dough or crumbs sticking to it.

Shelf levels ⁵

The shelf level on which you place your food for baking depends on the oven function and number of trays being used.

- Fan plus 
1 tray: level 2
2 trays: level 1+3 / 2+4
3 trays: level 1+3+5


When using the universal tray and baking tray to bake on two or more levels at the same time, place the universal tray underneath the baking tray.

Bake moist biscuits and cakes on a maximum of two levels at the same time.

- Moisture plus 
1 tray: level 2
- Intensive bake 
1 tray: level 1 or 2
- Conventional heat 
1 tray: level 1 or 2

Baking

Baking chart

Cakes / biscuits			
	 [°C]	 5	 [min]
Creamed mixture			
Sponge cake	150–170	2	60–70
Ring cake	150–170	2	65–80
Muffins (1 [2] tray(s))	150–170	2 [1+3 ⁴⁾	30–50
Small cakes (1 tray) ^{1) 2)}	150	2	25–35
Small cakes (2 trays) ^{1) 2)}	150 ³⁾	2+4	25–35
Foam cake (tray)	150–170	2	25–40
Marble, nut cake (tin)	150–170	2	60–80
Fresh fruit cake, with meringue topping (tray)	150–170	2	45–50
Fresh fruit cake (tray)	150–170	2	35–55
Fresh fruit cake (tin)	150–170	2	55–65
Flan base ¹⁾	150–170	2	25–35
Small cakes/biscuits ¹⁾ (1 [2] tray(s))	150–170	2 [1+3 ⁴⁾	20–25
Rubbed in mixture			
Flan base	150–170	2	20–25
Streusel cake	150–170	2	45–55
Small cakes/biscuits ¹⁾ (1 [2] tray(s))	150–170	2 [1+3 ⁴⁾	15–25
Drop cookies ^{1) 2)} (1 [2] tray/s)	140	2 [1+3 ⁴⁾	30–45
Cheese cake	150–170	2	70–95
Apple pie (tin Ø 20 cm) ^{1) 2)}	160	2	80–105
Apple pie ¹⁾	160–180	2	50–70
Apricot tart with topping (tin)	150–170	2	55–75
Swiss apple cake	–	–	–

The data for the recommended function is printed in bold.

Unless otherwise stated, the durations given are for an oven which has not been pre-heated. With a pre-heated oven, shorten durations by up to 10 minutes.

In general, if a range of temperatures is given, it is best to select the lower temperature and to check the food after the shortest duration.

					
 [°C]	 5 1	 [min]	 [°C]	 5 1	 [min]
150–170	2	60–70	–	–	–
150–170	2	65–80	–	–	–
160–180	2	25–45	–	–	–
160 ³⁾	3	25–35	–	–	–
–	–	–	–	–	–
170–190	2	25–40	–	–	–
150–170	2	60–80	–	–	–
170–190	2	45–50	–	–	–
170–190	1	35–55	–	–	–
160–180	2	55–65	–	–	–
170–190	2	20–25	–	–	–
160–180 ³⁾	3	15–25	–	–	–
170–190	2	15–20	–	–	–
170–190	2	45–55	–	–	–
160–180	3	15–25	–	–	–
160 ³⁾	2	15–33	–	–	–
170–190	2	85–95	150–170	2	75–90
180	1	80–95	–	–	–
170–190	1	45–65	160–180	1	50–70
170–190	2	55–75	150–170	2	50–60
220–240 ³⁾	1	35–50	190–210 ³⁾	1	25–40


 Fan plus /  Conventional heat /  Intensive bake

 Temperature /  5
1 Shelf level /  Duration

- 1) Do not use Rapid heat-up  during the heating-up phase.
- 2) The settings also apply for testing in accordance with EN 60350.
- 3) Pre-heat the oven.
- 4) Take the baking trays out of the oven early if the food is sufficiently browned before the specified duration has elapsed.

Baking

Baking chart

Cakes / biscuits			
	 [°C]	 5	 [min]
Sponge mix¹⁾			
Tart / flan base (2 eggs) ¹⁾	170–190	2	15–20
Sponge cake (4 to 6 eggs) ¹⁾	175–195	2	22–30
Whisked sponge cake ^{1) 2)}	180	2	20–30
Swiss roll ¹⁾	160–180	2	15–25
Yeast mixtures and quark dough			
Proving dough	50	⁵⁾	15–30
Gugelhupf	150–170	2	50–60
Stollen	150–170	2	55–65
Streusel cake	150–170	2	35–45
Fresh fruit cake (tray)	160–180	2	40–60
White bread	160–180	2	50–60
Wholegrain bread	170–190 ³⁾	2	50–60
Pizza (tray) ¹⁾	170–190	2	35–45
Onion tart	170–190	2	35–45
Apple turnovers (1 [2] tray(s))	150–170	2 [1+3 ⁴⁾]	25–30
Choux pastry ¹⁾, Eclairs (1 [2] tray(s))	160–180	2 [1+3 ⁴⁾]	30–45
Puff pastry (1 [2] tray(s))	170–190	2 [1+3 ⁴⁾]	20–25
Meringues, Macaroons (1 [2] tray(s))	120–140	2 [1+3 ⁴⁾]	25–50

The data for the recommended function is printed in bold.

Unless otherwise stated, the durations given are for an oven which has not been pre-heated. With a pre-heated oven, shorten durations by up to 10 minutes.

In general, if a range of temperatures is given, it is best to select the lower temperature and to check the food after the shortest duration.

					
 [°C]	 5 1	 [min]	 [°C]	 5 1	 [min]
170–190 ³⁾	2	10–20	–	–	–
170–190 ³⁾	2	20–40	–	–	–
150–180 ³⁾	2	20–45	–	–	–
170–190 ³⁾	2	15–20	–	–	–
50	⁵⁾	15–30	–	–	
160–180	1	50–60	–	–	
150–170	2	55–65	–	–	
170–190	2	35–45	–	–	
170–190 ¹⁾	3	40–55	170–190	2	40–55
160–180	2	50–60	–	–	–
190–210 ³⁾	2	50–60	–	–	–
190–210	2	30–45	170–190	2	40–50
180–200	2	25–35	170–190	2	25–35
160–180	2	25–30	–	–	–
180–200 ³⁾	3	30–40	–	–	–
190–210 ³⁾	2	20–25	–	–	–
120–140 ³⁾	2	25–50	–	–	–

 Fan plus /  Conventional heat /  Intensive bake

 Temperature /  Shelf level /  Duration

- 1) Do not use Rapid heat-up  during the heating-up phase.
- 2) The settings also apply for testing in accordance with EN 60350.
- 3) Pre-heat the oven.
- 4) Take the baking trays out of the oven early if the food is sufficiently browned before the specified duration has elapsed.
- 5) Place the rack on the floor of the oven, and stand the bowl containing the dough on the rack.

Roasting

Functions

Depending on how the food is prepared, you can use Fan Plus , Moisture plus  or Conventional Heat .

Containers

You can use any heat-resistant crockery:

Miele Gourmet oven dishes, roasting pans, ovenproof glass dishes, roasting bags, dishes made from earthenware or cast iron, the universal tray, rack and/or anti-splash insert (if available) on top of the universal tray.

We recommend roasting in oven dishes as this ensures that sufficient stock remains for making gravy. The oven also stays cleaner than when roasting on the rack.

Notes on the roasting chart

Temperature

As a general rule, select the lower temperature given in the chart. If higher temperatures are used, the meat will brown on the outside, but will not be properly cooked through.

When cooking with Fan Plus  or Moisture plus , select a temperature 20 °C lower than for Conventional Heat .

For cuts which weigh more than 3 kg, select a temperature approx. 10 °C lower than that given in the roasting chart. Roasting will take longer at the lower temperature, but will be more even.

When roasting on the rack, set a temperature approx. 10 °C lower than for roasting in an oven dish.

Pre-heat

Pre-heating is required when roasting beef sirloin joints and fillet.

Roasting duration ⊕

The traditional British method for calculating the roasting time is to allow 15 to 20 minutes per lb/450 grammes, according to type of meat, plus approx. 20 minutes, adjusting the length of time as roasting proceeds to obtain the required result. The roasting time can also be determined by multiplying the thickness of the roast [cm] with the time per cm [min/cm], depending on the type of meat:

- Beef/venison: 15–18 min/cm
- Pork/veal/lamb: 12–15 min/cm
- Sirloin/fillet: 8–10 min/cm

Check if the meat is cooked after the shortest duration quoted.

Shelf levels ⁵₁

As a general rule, use shelf level 2.

Tips

Browning

Browning only occurs towards the end of the roasting time. Remove the lid about halfway through the roasting time if a more intensive browning result is desired.

Standing time

At the end of the programme, take the roast out of the oven, wrap in aluminium foil and leave to stand for about 10 minutes. This helps retain juices when the meat is carved.

Roasting poultry

For a crisp finish, baste the poultry 10 minutes before the end of the cooking time with slightly salted water.

Roasting

Roasting chart

Meat/Fish		
	 [°C]	 [min]
Topside of beef, approx. 1 kg	170–190	100–130 ²⁾
Beef fillet or sirloin joint, approx. 1 kg	200–220	45–55 ³⁾
Venison, approx. 1 kg	140–160	100–120 ⁴⁾
Pork joint, approx. 1 kg	160–180	100–120 ⁴⁾
Pork joint with crackling, approx. 2 kg	160–180	130–160 ⁴⁾
Gammon joint, approx. 1 kg	150–170	60–80 ⁴⁾
Meat loaf, approx. 1 kg	160–180	60–70 ⁴⁾
Veal, approx. 1.5 kg	180–200	80–100 ⁴⁾
Leg of lamb, approx. 1.5 kg	170–190	90–120 ⁴⁾
Saddle of lamb, approx. 1.5 kg	170–190	50–60 ³⁾
Poultry, 0.8–1 kg	180–200	60–70
Poultry, approx. 2 kg	170–190	100–120
Poultry, stuffed, approx. 2 kg	170–190	110–130
Poultry, approx. 4 kg	160–180	150–180
Fish, whole, approx. 1.5 kg	160–180	35–55

The data for the recommended function is printed in bold.

The times given are for an oven which has not been pre-heated.

In general, if a range of temperatures is given, it is best to select the lower temperature and to check the food after the shortest time.

The temperatures quoted are for roasting in an open dish.

Lower the temperature by approx. 10 °C if roasting directly on the universal tray or on the rack with the universal tray underneath.

 1)			
 [°C]	 [min]	 [°C]	 [min]
–	–	190–210	110–140 2)
–	–	200–220	45–55 3)
140–160	100–120 4)	150–170	100–120 4)
160–180	110–130 4)	180–200	100–120 4)
170–190	130–160 4)	190–210	130–160 4)
160–180	60–80 4)	170–190	80–100 4)
170–190	60–70 4)	190–210	60–70 4)
170–190	90–110 4)	190–210	100–120 4)
170–190	90–120 4)	200–220	90–120 4)
–	–	190–210	50–60
190–210	60–70	190–210	60–75 5)
180–200	90–110	190–210	90–110 5)
180–200	100–120	190–210	110–130 5)
170–190	140–170	180–200	150–180
170–190	35–55	190–210	35–55

 Fan plus /  Moisture plus /  Conventional heat

 Temperature /  Cooking duration

As a general rule, use shelf level 2.

- 1) After the heating-up phase, inject the bursts of steam at intervals throughout the cooking duration.
- 2) Roast with the lid on first, then remove the lid halfway through roasting and add approx. ½ litre liquid.
- 3) Pre-heat the oven, but do not use Rapid heat-up .
- 4) Add approx. ½ litre liquid halfway through roasting.
- 5) Use level 3.

Low temperature cooking

This method is ideal for cooking beef, pork, veal or lamb when a tender result is required.

First sear the meat all over at a high temperature on the hob in order to seal it.

Then place the meat in the pre-heated oven where the low temperature and long cooking duration will cook it to perfection and ensure it is very tender.

The meat will relax and the juices inside will start to circulate evenly throughout the meat to reach the outer layers. This will give very tender and succulent results.

Tips

- Use lean meat which has been correctly hung and trimmed. Bones should be removed before cooking.
- For searing, use a suitable cooking oil or fat that can withstand high temperatures (e.g. clarified butter, vegetable oil).
- Do not cover meat during cooking.

Cooking takes between 2-4 hours depending on the size and weight of the meat and on how well cooked you want it as well as the level of browning required.

Procedure

Use the universal tray with the rack placed on top of it.

Do not use the Rapid Heat-up  function to pre-heat the oven.

- Place the rack together with the universal tray on shelf level 2.
- Select Conventional heat  and a temperature of 130 °C.
- Pre-heat the oven together with the universal tray and rack for approx. 15 minutes.
- Whilst the oven is pre-heating, sear the meat thoroughly on the hob.



Danger of burning.

Use oven gloves when placing food in the oven, turning or removing it and when adjusting oven shelves etc. in a hot oven.

- Place the seared meat on the rack.
- Reduce the temperature to 100 °C.
- Continue cooking until the end of the cooking duration.

You can set this procedure to finish automatically (see "Operation - entering a cooking duration").

Low temperature cooking

After cooking

Because the cooking and core temperatures are very low:

- Meat can be carved straight from the oven. It does not need to rest.
- The cooking result will not be affected if the meat is left in the oven after the programme has finished. It can be kept warm until you serve it.
- The meat is an ideal temperature to eat straight away. Serve on pre-heated plates with very hot sauce or gravy to prevent it cooling down too quickly.

Cooking duration / Core temperatures

Meat	Duration [min]	Core temperature** [°C]
Sirloin joint		
– Rare	60–90	48
– Medium	120–150	57
– Well done	180–240	69
Pork fillet	120–150	63
Gammon*	150–210	68
Saddle of veal*	180–210	63
Saddle of lamb*	90–120	60

* Boned

** You can use a proprietary food probe if you have one to monitor the core temperature.

Grilling



Danger of burning.

Grill with the oven door closed. If you grill with the door open, hot air will escape from the oven instead of being cooled by the cooling fan.

The controls will get hot.

Functions

Grill

For grilling larger quantities of thin cuts (e.g. steaks) and browning baked dishes.


The whole of the top heating / grill element will get hot and glow red.

Fan grill

For grilling larger items, e.g. rolled meat, poultry.

The top heating / grill element and the fan switch on and off alternately.

Trays and racks



Use the universal tray with the rack or anti-splash insert (if available) on top. The juices from the food being cooked collect under the insert. This prevents them from spitting and making the oven dirty. The juices can then be used for making gravy and sauces.

Do not use the baking tray.

Notes on the grilling chart

Temperature

As a general rule, select the lower temperature given in the chart. If higher temperatures are used, the meat will brown on the outside, but will not be properly cooked through.

Pre-heating

Always pre-heat the grill for approx. 5 minutes with the door closed.

Shelf levels

Select the shelf level according to the thickness of the food.

- Thin cuts: Shelf level 3/4
- Thicker cuts: Shelf level 1/2

Grilling duration

- Flat pieces of fish and meat usually take 6–8 minutes per side. Thicker pieces require more time for each side. It is best to grill food of a similar thickness at the same time so that the grilling time for each item does not vary too greatly.
- Turn the food halfway through grilling.

Testing to see if cooked

One way of finding out how well a piece of meat has been cooked is to press down on it with a spoon:

- | | |
|-----------|--|
| Rare: | If the meat gives easily to the pressure of the spoon, it will still be red on the inside. |
| Medium: | If there is some resistance, the inside will be pink. |
| Well-done | If there is very little resistance, it is cooked through. |

Check if the meat is cooked after the shortest time quoted.

Tip

If the surface of thicker cuts of meat is cooked but the centre is still raw, continue grilling at a lower temperature setting or use a lower shelf level to allow the food to cook through to the centre.

Grilling

Preparing food for grilling

Trim the meat. Do not season meat with salt before grilling as this draws the juices out.

Add a little oil to lean meat if necessary. Do not use other types of fat as they can burn and cause smoke.

Clean fish in the normal way. To enhance the flavour, add a little salt or squeeze a little lemon juice over the fish.

Grilling

- Place the rack or the anti-splash insert (if available) in the universal tray.
- Place the food on top.
- Select the required oven function and the temperature.
- Pre-heat the grill for approx. 5 minutes with the door closed.



Danger of burning.

Use oven gloves when placing food in the oven, turning or removing it and when adjusting oven shelves etc. in a hot oven.

- Place the food on the appropriate shelf level (see the Grilling chart).
- Close the door.
- Turn the food halfway through grilling.

Grilling chart

The data for the recommended function is printed in bold.

Pre-heat the grill for approx. 5 minutes with the door closed, unless advised otherwise.

Turn the food halfway through grilling.

Check the food after the shortest duration quoted.

Food to be grilled	 5 1				
		 [°C]	 [min]	 [°C]	 [min]
Thin cuts					
Steak	4	275	15–22	220	15–20
Beef burgers ¹⁾	4	300	17–28	–	–
Kebabs	3	275	25–30	220	25–30
Chicken kebabs	4	275	20–25	220	12–16
Pork chops	4	275	15–20	220	17–23
Liver	4	275	8–12	220	12–15
Burgers	4	275	15–20	220	18–22
Sausages	4	275	12–18	220	13–19
Fish fillet	4	275	20–25	220	13–18
Trout	4	275	16–20	220	20–25
Toast ^{1) 2)}	3	300	5–10	220	7–10
Cheese toast	3	275	10–15	220	10–15
Tomatoes	4	275	6–10	220	8–10
Peaches	4	275	6–10	220	15–20
Thicker cuts					
Chicken, approx. 1.2 kg ³⁾	1	220	60–70	190	60–70
Pork, approx. 1 kg	1	–	–	190	95–100
Sirloin joint, fillet, approx. 1 kg	2	–	–	250	35–45

 Full grill /  Fan grill /  Level /  Temperature /  Duration

1) The settings also apply when using the Full grill  function for testing in accordance with EN 60350.

2) Do not pre-heat the grill.

3) Use shelf level 2 for Fan grill .

Defrosting

Use Fan plus  with the temperature set between 30 °C and 50 °C for gently defrosting food.

 Danger of salmonella poisoning. It is particularly important to observe food hygiene rules when defrosting poultry. Do not use the liquid from the defrosted poultry. Pour it away, and wash the tray, the sink and your hands.

Tips

- Where possible, remove the packaging and put the food to be defrosted on the universal tray or into a suitable dish.
- When defrosting poultry, put it on the rack over the universal tray to catch the defrosted liquid so that the meat is not lying in this liquid.
- Meat, poultry and fish do not need to be fully defrosted before cooking. Defrost so that the surface is sufficiently thawed to take herbs and seasoning.

Defrosting durations

The duration needed for defrosting depends on the type and weight of the food.

Frozen food	Weight [g]	Duration [min]
Chicken	800	90–120
Meat	500	60–90
	1000	90–120
Sausages	500	30–50
Fish	1 000	60–90
Strawberries	300	30–40
Butter cake	500	20–30
Bread	500	30–50

Drying is a traditional method of preserving fruit, certain vegetables and herbs.

It is important that fruit and vegetables are ripe and not bruised before they are dried.

- Prepare the food for drying
 - Peel and core apples, and cut into slices 0.5 cm thick.
 - Stone plums, if necessary.
 - Peel, core and cut pears into thick wedges.
 - Peel and slice bananas.
 - Clean mushrooms and cut them in half or slice them.
 - Remove parsley and dill from the stem.
- Distribute the food evenly over the universal tray.

Use the Gourmet perforated baking tray, if you have one.

- Select Fan plus  or Conventional heat .
- Select a temperature of 80–100 °C.
- Place the universal tray on shelf level 2.
With Fan plus  you can dry produce on levels 1+3 at the same time.

Food	
Fruit	2–8 hours
Vegetables	3–8 hours
Herbs*	50–60 minutes

 Drying time

* Use Conventional heat  for drying herbs.

- Reduce the temperature if condensation begins to form in the oven.

 Danger of burning. Wear oven gloves when removing the dried food from the oven.

- Allow the dried fruit or vegetables to cool down after drying.

Dried fruit must be completely dry, but also soft and elastic.

- Store in sealed glass jars or tins.

Frozen food/Ready meals

Tips

Cakes, pizza, baguettes

- Large frozen items such as cakes, pizzas or baguettes cover an extensive area of the baking tray or universal tray.
The temperature difference if large frozen items are cooked in these trays can cause the tray to distort in such a way that it cannot be removed from the oven when it is hot. Further use will make the distortion worse. Place this type of food on baking parchment on the rack to prevent the risk of this happening.
- Use the lowest temperature recommended on the manufacturer's packaging.

Oven chips, croquettes or similar items

- Small items of frozen food such as oven chips can be cooked on the baking tray or universal tray.
Place baking parchment on the tray so that they cook gently.
- Use the lowest temperature recommended on the manufacturer's packaging.
- Turn several times during cooking.

Method

Eating food which has been cooked correctly is important for good health.

Only bake cakes, pizza, chips etc. until they are golden. Do not overcook them.

- Select the function and temperature recommended on the manufacturer's packaging.
- Pre-heat the oven.
- Place the food in the pre-heated oven on the shelf level recommended on the packaging.
- Check the food at the end of the shortest duration recommended on the packaging.

The Gentle bake  programme is ideal for cooking meat.

Examples of use

Food	 [°C]	 [min]
Ham roast, approx. 1.5 kg	180	130–160
Braised beef, approx. 1.5 kg	180	160–180

 Temperature

 Duration

The durations given are for an oven which has not been pre-heated.

Use shelf level 1 or 2 depending on the height of the food.

In general, if a range of temperatures is given, it is best to select the lower temperature and to check the food after the shortest duration.

Roast with the lid on first, then remove the lid three-quarters of the way through roasting and add approx. ½ litre liquid.

Cleaning and care

 Danger of burning. Make sure the oven heating elements are switched off and that the oven cavity is cool.

 Danger of injury. Do not use a steam cleaning appliance to clean this appliance. The steam could reach electrical components and cause a short circuit.

All external surfaces are susceptible to discolouration or change in appearance if unsuitable cleaning agents are used.

Oven cleaners and descaling agents will damage the front of the oven, in particular.

Residues of cleaning agents must be removed immediately after use. All surfaces are also susceptible to scratches. Scratches on glass surfaces could even cause a breakage in certain circumstances.

Unsuitable cleaning agents

To avoid damaging the surfaces, do not use:

- cleaning agents containing soda, ammonia, acids or chlorides,
- cleaning agents containing descaling agents on the oven front,
- abrasive cleaning agents, e.g. powder cleaners and cream cleaners,
- solvent-based cleaning agents,
- stainless steel cleaning agents,
- dishwasher cleaner,
- glass cleaning agents,
- cleaning agents for ceramic hobs,
- hard, abrasive brushes or sponges, e. g. pot scourers, brushes or sponges which have been previously used with abrasive cleaning agents,
- melamine eraser blocks,
- sharp metal scrapers or tools,
- wire wool,
- spot cleaning,
- oven cleaner*,
- stainless steel spiral pads*.

* these can, however, be used to remove very heavy soiling from PerfectClean treated surfaces.

Soiling might become impossible to remove if it is not dealt with. Continued use of the oven without regular cleaning will make it much harder to keep clean. Soiling is, therefore, best removed after each use of the oven.

The accessories are not dishwasher-proof.

Tips

- Soiling caused by spilt juices and cake mixtures is best removed whilst the oven is still warm. Exercise caution and make sure the oven is not too hot - danger of burning.
- To make cleaning easier you can dismantle the oven door, remove the side runners and the FlexiClip runners (if present) and lower the top heating/grill element.

Normal soiling

There is a fibreglass seal around the oven interior which seals the inside of the door. It is sensitive to abrasion and rubbing. To prevent the risk of damaging it do not clean it.

- It is best to remove normal soiling immediately using a clean sponge and a solution of hot water and washing-up liquid or with a clean, damp microfibre cloth.
- After cleaning make sure all residual cleaning agent is thoroughly removed with clean water. This is particularly important when cleaning PerfectClean surfaces as cleaning agent residues can impair the non-stick properties.
- After cleaning, wipe the surfaces dry using a soft cloth.

Cleaning and care

Stubborn soiling (does not apply to the FlexiClip runners)

Spilt fruit and roasting juices may cause lasting discolouration or matt patches on enamelled surfaces. This discolouration is permanent but will not affect the efficiency of the finish. Do not try to remove this discolouration! Clean these following the instructions given here.

- Baked on deposits can be removed with a glass scraper or a non-abrasive stainless steel spiral pad.
- Very stubborn soiling on PerfectClean treated enamel can be cleaned using Miele oven cleaner. It must be applied to cold surfaces in accordance with instructions on the packaging.

Non-Miele oven spray must only be used in a cold oven and for no longer than a maximum of 10 minutes.

- You can then also use the scouring pad on the back of a washing-up sponge to remove the soiling.
- After cleaning, remove all oven cleaning agent residues thoroughly with clean water, and dry with a soft cloth.

Pyrolytic cleaning of the oven interior

Instead of cleaning the oven manually you can run the Pyrolytic cleaning programme .

During pyrolytic cleaning the oven interior is heated up to over 400 °C. Any residual soiling is broken down and reduced to ash by the high temperatures.

This oven has three levels of pyrolytic cleaning, each with a different duration.

Select:

- Level 1 for light soiling
- Level 2 for heavier soiling
- Level 3 for very heavy soiling

For safety reasons the oven door is automatically locked at the beginning of the pyrolytic cleaning process.

It cannot be opened until the programme has finished.

The timer can be used to delay the start time of the Pyrolytic cleaning programme, for instance to make use of cheaper electricity tariffs.

At the end of pyrolytic cleaning any residues such as ash from the pyrolytic process can be easily wiped away.

Setting up for pyrolytic cleaning

The high temperatures used during pyrolytic cleaning will damage accessories that are not designed for pyrolytic cleaning.

Please remove these accessories from the oven interior before starting pyrolytic cleaning. This also applies to non-pyrolytic accessories purchased separately to the oven.

The following accessories are suitable for pyrolytic cleaning and can be left in the oven:

- Side runners
- FlexiClip telescopic runners HFC72
- Rack HBBR72
- Take all non-pyrolytic accessories out of the oven.
- Place the rack on the top shelf level.

If not removed, coarse soiling can smoke and cause the Pyrolytic cleaning programme to switch itself off.

- Coarse soiling should be removed before running the Pyrolytic cleaning programme.

Cleaning and care

Starting Pyrolytic cleaning



Danger of burning.

The oven door gets much hotter during pyrolytic operation than during normal use.

Make sure children cannot touch the oven whilst a Pyrolytic cleaning programme is running.

- Select Pyrolytic cleaning

PY 1 appears in the display. The number flashes.

Use the rotary dial *< >* to select between *PY 1*, *PY 2* and *PY 3*.

- Select the level required.
- Touch the OK sensor.

Pyrolytic cleaning will now start.

will also appear in the display.

will flash until the door locks.

The oven heating and the cooling fan will then switch on automatically.

The oven lighting will not come on during the Pyrolytic cleaning programme.

If you want to see how the Pyrolytic cleaning programme is progressing you need to highlight the duration symbol in the display.

- Touch
- If necessary, use the rotary selector *< >* to move triangle until it appears under

The time remaining for the Pyrolytic cleaning programme will appear in the display. You cannot alter the duration.

You can use the minute minder at the same time as running the cleaning programme. At the end of the minute minder time the buzzer will sound, will start flashing and the time can be viewed counting up in the display.

The acoustic and visual signals will go out when you press OK.

PY and the number indicating the selected Pyrolytic cleaning programme will then reappear in the display.

To delay the start time of the Pyrolytic cleaning programme

Start the programme as described above and then set the required finish time within the first five minutes of starting the programme.

- Touch '≡'.
- Use the rotary selector < > to move triangle ▲ until it appears under ⌚.
- - will appear.
- Touch the OK sensor.

The display will then show the finish time calculated from the current time of day plus the duration of the selected Pyrolytic cleaning programme.

- Use the rotary selector to select the required finish time.
- Touch the OK sensor.


The finish time is now set and has been saved to memory.

The oven heating will now switch off.

The finish time can be changed at any time up until the start time for the programme.

As soon as the start time is reached, the oven heating and the cooling fan will switch on. The duration will show in the display.

At the end of pyrolytic cleaning

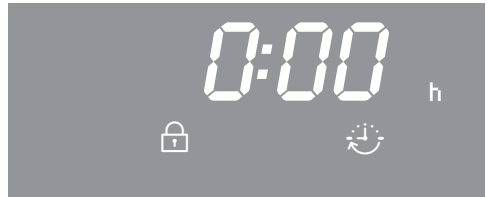

0:00,  and  will appear in the display.

The door is locked as long as the  symbol is lit up. The  symbol will start flashing as soon as the door lock has been released.

When the door lock has been released

- the  symbol will go out,
- the  symbol will start flashing,
- short beeps will sound if the buzzer tone is activated (see "Settings").

- Turn the function selector to ●.

The visual and acoustic signals are switched off.

Cleaning and care



Danger of burning

Wait until the oven has cooled down before removing residual soiling left in the oven compartment from pyrolytic cleaning.

- Wipe any residues (e.g. ash) left behind after pyrolytic cleaning out of the oven compartment and wipe any residues off any pyrolytic accessories. The amount of ash will vary depending on how dirty the oven was.

Most soiling can be easily removed using a clean, damp microfibre cloth, or with hot water and a little washing-up liquid on a clean sponge.

Depending on how dirty the oven was there may be a visible layer of soiling across the inner glass pane on the door. This should be removed using the pad on the reverse of a non-scouring washing-up sponge or with a stainless steel spiral pad and a little washing-up liquid.

- Extend and retract the FlexiClip telescopic runners several times after running the Pyrolytic cleaning programme.

Please note:

- The fibre glass seal around the front of the oven should be handled carefully. Do not rub and scour it. If possible you should avoid trying to clean it.
- After pyrolytic cleaning the FlexiClip telescopic runners may appear discoloured or a lighter colour in some places. This will not affect the functioning of the runners in any way.
- Spilt fruit juices may cause lasting discolouration to enamelled surfaces. This discolouration is permanent but will not affect the efficiency of the enamel. Do not attempt to remove these marks.

If pyrolytic cleaning is cancelled

If the Pyrolytic cleaning programme is cancelled the oven door will remain locked until the temperature inside the oven drops to below 280 °C. The  symbol will light up until the temperature has dropped below this level.

The door can be opened as soon as the  symbol starts flashing.

The following will cause the Pyrolytic cleaning programme to stop:

- Turning the function selector to ●.

Once the door has been unlocked,  will go out and the time of day will reappear in the display. If necessary start the pyrolytic programme  again.

- Turning the function selector to a different function.

Py and  will appear in the display.

Once the door has been unlocked,  will go out and **Py** will start to flash.

- A power cut.

Py and  will appear in the display.


Once the door has been unlocked,  will go out and **Py** will start to flash.

When power is restored **Py** will light up until the temperature in the oven has dropped below 280 °C.  will then appear in the display.

The door lock releases.  goes out and the time of day reappears.

Cleaning and care


Removing the door

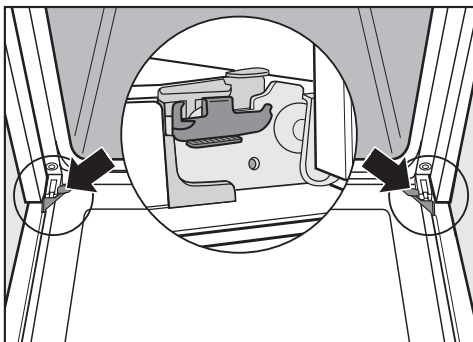

The oven door is connected to the hinges by retainers.

Before removing the door from the retainers, the locking clamps on both hinges have to be released.

- Open the door fully.

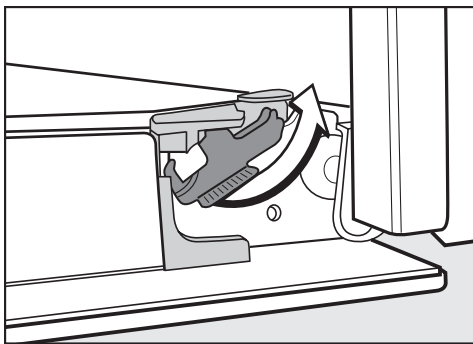

- Release the locking clamps by turning them as far as they will go.

Do not attempt to take the door off the retainers when it is in the horizontal position as the retainers will spring back against the oven.

Do not use the handle to pull the door off the retainers as the handle could break.

- Raise the door up till it rests open.



- Holding the door securely at both sides lift it upwards off the retainers. Make sure you take it off straight.

Dismantling the door

The oven door is an open system with four glass panes which have a heat-reflective coating on some of their surface.

When the oven is operating, air is directed through the door to keep the outer pane cool.

If soiling has worked its way in between the glass panes, the door can be dismantled in order to clean in between the panes.

Take particular care as scratches can damage the glass. When cleaning the glass panes do not use abrasive cleaning agents, hard sponges or brushes and do not use sharp metal tools or scrapers. Please also read the general notes on cleaning the oven front before cleaning the glass panes.


The glass panes are coated in different ways with a heat-reflective coating on the sides facing into the oven cavity. The glass panes must be fitted the right way round after being cleaned.

Oven spray will damage the aluminium trims inside the door. These should only be cleaned using hot water and washing-up liquid applied with a clean sponge or a clean, damp microfibre cloth. Be especially vigilant after dismantling the door that the glass panes do not break.

Cleaning and care


 **Danger of injury.**
Always remove the door before dismantling it.

- Place the door on a protective surface (e.g. on a tea towel) to prevent it getting scratched. The door handle should line up with the edge of the table. Make sure the glass lies flat and does not get broken during cleaning.

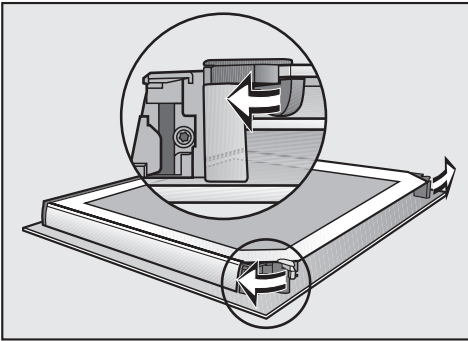


- Flip the two glass pane retainers outwards to open them.


You can now remove the inner panes and the two middle panes one after the other.

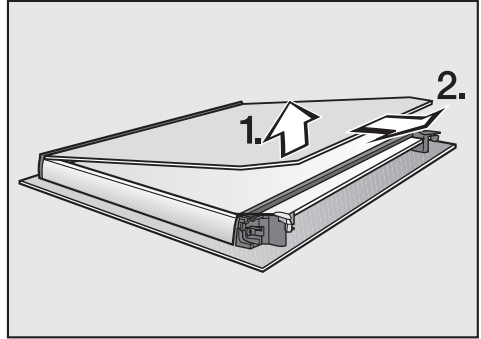


- **Gently** lift the inner pane up and out of the plastic strip.

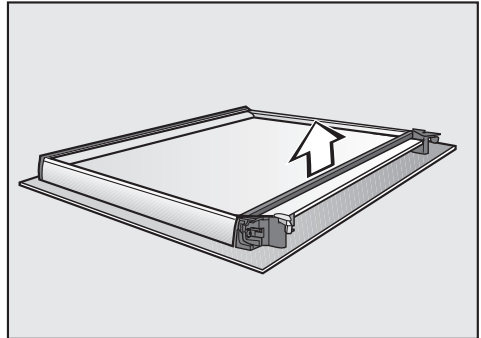

- Remove the seal.

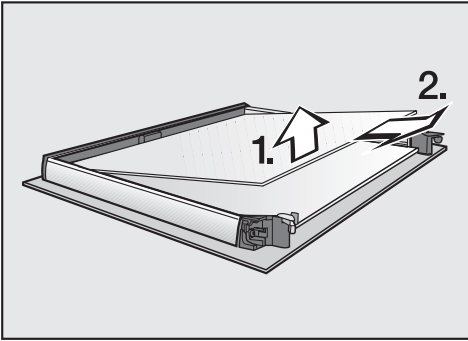

- Gently lift the top of the two middle panes up and take it out.

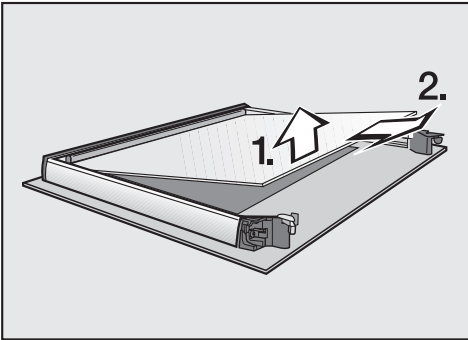


- Then lift the bottom of the two middle panes up gently and take it out.
- Clean the door panes and other individual parts with a clean sponge and a solution of hot water and washing-up liquid or a clean damp microfibre cloth.
- Dry all parts with a soft cloth.

Then reassemble the door carefully:


The two middle panes are identical. To help you put them back in correctly the material number is printed on the panes.

- Refit the lower of the two middle panes in such a way that the material number is legible.

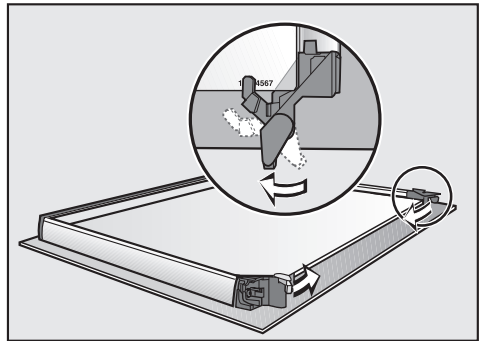


- Flip both the glass pane retainers inwards in such a way that they fit over the lower of the two middle panes.
- Then refit the upper of the middle two panes in such a way that the material number is legible. The glass pane should lie on top of the retainers.

Cleaning and care

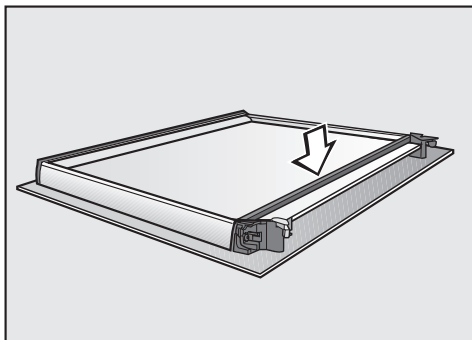


- Refit the seal.

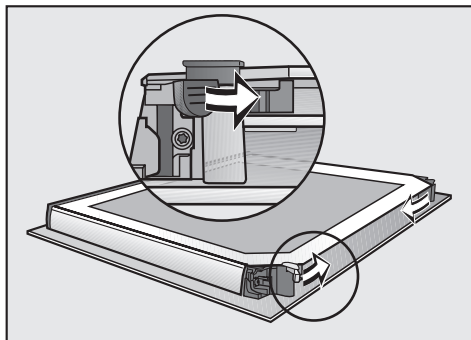


- Flip both the glass pane retainers inwards to close them.

The door is now reassembled and is ready to fit back on the oven.

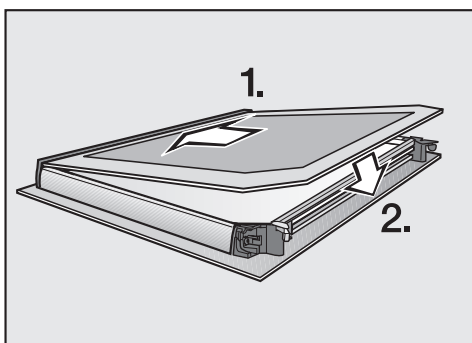

- Push the inner pane with the matt printed side facing downwards into the plastic strip and place it between the retainers.


Refitting the door

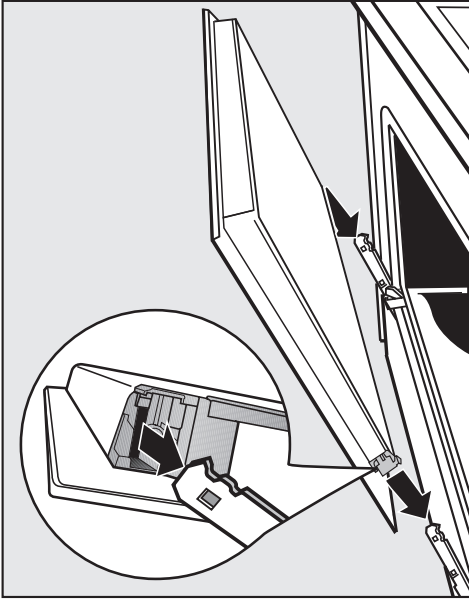

- Hold the door securely at both sides and carefully fit it back into the hinge retainers.

- Open the door fully.

It is essential that the locking clamps lock securely when the door is refitted after cleaning. Otherwise the door could work loose from the retainers and be damaged.

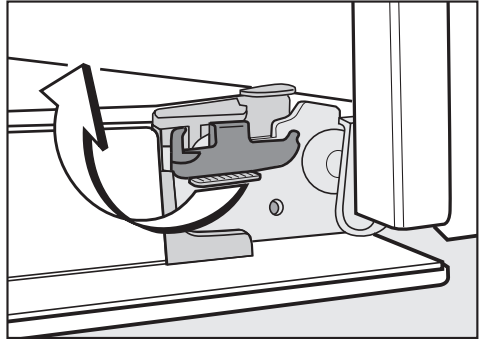

- Flip both locking clamps back up as far as they will go into a horizontal position.

Cleaning and care

Removing the side runners


Remove the side runners for cleaning.

 **Danger of injury.**
Do not use the oven without the side runners.

You can remove the side runners together with the FlexiClip runners (if present).

If you wish to remove the FlexiClip runners separately beforehand, please follow the instructions in "Features – Fitting and removing the FlexiClip runners".

 **Danger of burning.**
Make sure the oven heating elements are switched off and cool.

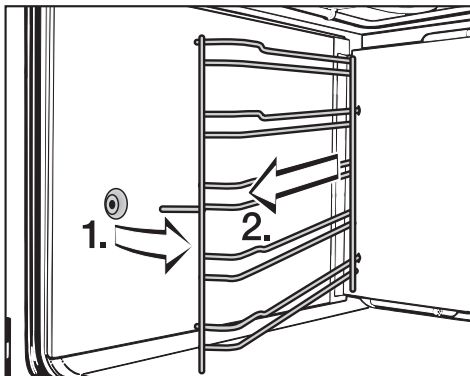

- Pull the runners out of holder (1) at the front of the oven and then pull them out of the oven (2).


Refit in the reverse order.

- Take care and ensure that all parts are correctly fitted.

Lowering the top heat/grill element

 Danger of burning.
Make sure the oven heating elements are switched off and cool.

- Remove the side runners.

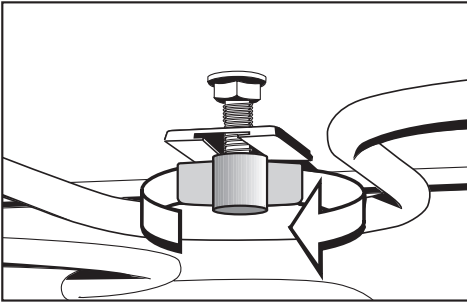

- Undo the wing nut.

Do not use force to lower the top heat/grill element as this can cause it to break.

- Carefully lower the top heat/grill element.

You can now clean the roof of the oven.

- Raise the top heat/grill element and tighten the wing nut securely.
- Refit the side runners.

Cleaning and care

Descaling the steam injection system

When to run the descaling process

The frequency of descaling will depend on the water hardness level in your area.

The descaling process can be run at any time.

However, to ensure that the oven functions correctly you will be automatically prompted to run the descaling process after a certain number of programmes.

If Moisture plus  is selected, the display shows a prompt to run the descaling process.



You can use the Moisture plus  function 10 more times before descaling. After the 10th programme, the function will be locked and cannot be used until descaling is carried out.

The prompt will disappear after a few seconds. You can also dismiss it by touching OK.

All other modes can still be used.

The number of cooking processes available until the function locks out will count down in the display until  0 and  appear.



After that the Moisture plus function  is locked and can only be used again after the descaling process has been run.

Sequence of a descaling cycle

The descaling cycle takes approx. 90 minutes and consists of several steps:

E 0: Drawing in the descaling solution

E 1: Activation phase

E 2: Rinse 1

E 3: Rinse 2

E 4: Rinse 3

E 5: Evaporating the residual moisture

Preparation

We recommend using the descaling tablets supplied. They have been specially developed for Miele for optimum results.

Other descaling agents, which contain other acids besides citric acid and/or other undesirable substances, such as chlorides for example, could cause damage. Moreover, the descaling effect required could not be guaranteed if the descaling solution was not of the appropriate concentration.

Miele descaling tablets are available to order from Miele or via the internet at www.miele-shop.com.


You will need a container of approx. 1 litre capacity.

A plastic tube (with suction cup) is supplied with your oven so that you do not have to hold the container with the descaling agent underneath the water intake pipe.

- 1 Place the end of the plastic tube in the bottom of the container and secure the tube with the suction cup.

Follow the instructions for the mixing ratio carefully. Otherwise the oven will be damaged.

- 2 Fill the container with approx. 600 ml cold tap water and completely dissolve 1 descaling tablet in it.

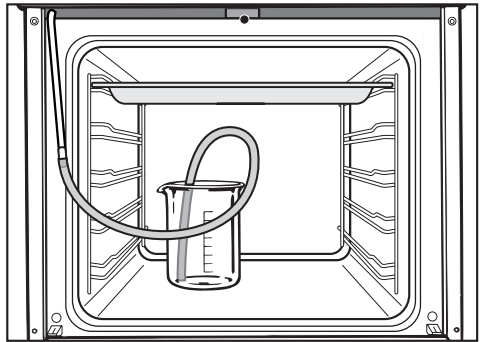

- 3 Place the universal tray on the top shelf level to collect the descaling solution after it has been used.
- 4 Place the container with the descaling solution on the floor of the oven. Secure the other end of the plastic tube to the water intake pipe.
- 5 Close the door.

Cleaning and care

Carrying out the descaling process

As soon as the intake process **E 0** has been started the descaling process can no longer be cancelled.

- 6 Select the Moisture plus  function.
- 7 Use the rotary selector to select **E**.
- 8 Touch the OK sensor.

If the Moisture plus  function was already locked, the descaling process can be started immediately by touching the OK sensor.

The prompt for the **drawing in process** (**E 0**) will appear and the triangle ▲ will flash under .



- 9 Touch the OK sensor.

The intake process will begin. You can hear the pump while this is happening.

The amount of solution specified can be more than the amount which is actually taken in. Some of the solution may therefore be left in the container at the end of descaling.

The **activation phase** (**E 1**) will begin. You can follow the duration as it counts down.




- 10 Open the door.
- 11 Leave the container with the tube connected to the water intake pipe in the oven. Top the container up with approx. 300 ml of water, as the system will need to draw in some more liquid during the activation phase.
- 12 Close the door.

The system will take in more liquid at approximately 5 minute intervals. You will hear the noise of the pump for a moment or so.

The descaling step can be displayed:

- Touch .
- Use the rotary selector to select .

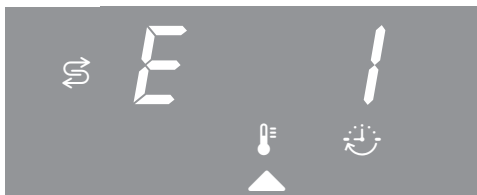

- To display time remaining, use the rotary selector to move the triangle ▲ until it is under .

At the end of the activation phase a buzzer will sound three times, if the buzzer is switched on (see "Settings – P 2").

At the end of the activation phase the steam injection system will need to be cleaned to remove all traces of descaling solution.

Cleaning is carried out by flushing approx. 1 litre of fresh tap water through the system. The water is collected in the universal tray. This process is repeated three times.

- 13 Take the universal tray out of the oven and empty it. Place the tray back in the oven again on the top shelf level.
- 14 Detach the plastic tube from the container.
- 15 Rinse the container and fill with approx. 1 litre of fresh tap water.
- 16 Place the container back in the oven, insert the plastic tube, secure it to the container and close the door.
- 17 Touch the OK sensor.

The **first rinse** will be shown in the display as **E 2**.

Water will be flushed through the steam injection system and will then collect in the universal tray.

- 18 Take the universal tray out of the oven and empty it. Place the tray back in the oven again on the top shelf level.
- 19 Detach the plastic tube from the container. Fill it with approx. 1 litre of fresh tap water.
- 20 Place the container back in the oven, insert the plastic tube, secure it to the container and close the door.
- 21 Touch the OK sensor.

The **second rinse** will be shown in the display as **E 3**.

- 22 Repeat the last four steps.

The **third rinse** will be shown in the display as **E 4**.

Leave the universal tray (with the water which has collected in it) on the top oven shelf whilst the evaporation process takes place.

- 23 Remove the container and tube from the oven.

Cleaning and care

Start the **Evaporate residual moisture** process (E 5).

Steam can cause scalding injuries.
Do not open the door during the
evaporation process.



24 Touch the OK sensor.

The oven heating will switch on and the duration will count down in the display.




During the evaporation process, the duration may be adjusted by the system according to how much water is currently present.

The last minute will count down in seconds.

At the end of the evaporation process

- a buzzer will sound three times if the buzzer is switched on (see "Settings – P 2"),
- 0:00 will appear and a steam icon will flash.

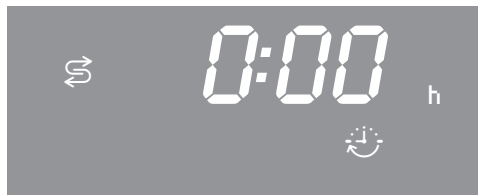

25 Turn the function selector to ●.

⚠ Danger of burning.
Allow the oven interior and
accessories to cool down before
cleaning them.

26 Remove the universal tray and empty it. Clean the oven interior to remove any condensation and descaling agent residue.

Leave the oven door open until the oven interior is completely dry.

Problem solving guide

With the aid of the following guide, minor problems can be easily corrected without contacting Miele. The following guide may help you to find the reason for a fault, and to correct it. If having followed the suggestions below, you still cannot resolve the problem, please contact Miele (see back cover for contact details).



Danger of injury.

Installation, maintenance and repairs may only be carried out by a suitably qualified and competent person. Repairs and other work by unqualified persons could be dangerous.

Miele cannot be held liable for unauthorised work.

Do not attempt to open the casing of the oven yourself.

Problem	Possible cause and remedy
The display is dark.	The time of day display is deactivated, so when the appliance is switched off, the time of day display is switched off ■ As soon as the oven is switched on, the time of day will appear. If you want it to be displayed constantly, the setting to switch the time of day display back on must be changed (see "Settings – P I").
	There is no power to the oven. ■ Check whether the mains fuse has tripped. If it has, contact a qualified electrician or Miele.
A function has been selected and the time of day and the  symbol are still in the display.	The system lock  has been switched on. ■ Switch off the system lock (see "System lock ").


Problem solving guide

Problem	Possible cause and remedy
The oven does not heat up.	Demo mode has been activated. <i>DE5_</i> appears in the display. The oven can be operated but does not heat up. ■ Deactivate demo mode (see "Settings – <i>P 8</i> ").
A function has been selected but the oven is not working.	There has been a power cut which has caused a current process to stop. ■ Turn the function selector to the ● position and switch the oven off. Start the cooking process again.
<i>12:00</i> appears and the triangle ▲ is flashing under ⌚.	The power supply was interrupted for longer than 200 hours. ■ Reset the time of day (see "Using for the first time").
<i>0:00</i> appears unexpectedly in the display and 🔔 is flashing at the same time. The buzzer might also be sounding.	The oven has been operating for an unusually long time and this has activated the safety switch-off function. ■ Turn the function selector to ●. The oven is now ready to use again immediately.

Problem	Possible cause and remedy
<i>F 32</i> appears in the display.	The Pyrolytic cleaning programme door lock is not locking. ■ Turn the function selector to ● and select the required pyrolytic cleaning programme again. If the fault code appears in the display again call the Miele Service Department.
<i>F 33</i> appears in the display.	The door lock for the Pyrolytic cleaning programme is not being released. ■ Turn the function selector to ● and switch the oven off with the ① sensor. If the door lock still does not release itself call the Miele Service Department.
<i>F XX</i> appears in the display.	There is a problem that you cannot resolve. ■ Call the Miele Service Department.
No water is being taken in on Moisture plus  function.	Demo mode is activated. The oven can be operated but the pump for the steam injection system does not work. Deactivate demo mode (see "Settings – <i>P 8</i>").
	The pump for the steam injection system is faulty. ■ Call the Miele Service Department.

Problem solving guide

Problem	Possible cause and remedy
A noise can be heard after a cooking process.	The cooling fan is switched on. The cooling fan will switch off automatically when the temperature in the oven interior has fallen sufficiently.
The rack and other accessories make a noise when being pushed into or pulled out of the oven.	The pyrolytic resistant surface of the side runners creates friction when accessories are being pushed into or pulled out of the oven. To reduce the friction, add a few drops of heat resistant cooking oil to some kitchen paper and use this to lubricate the side runners. Repeat this after each pyrolytic cleaning process.
The oven has switched itself off.	The oven will switch itself off automatically to save energy if no other action is taken within a certain time frame after switching it on or after the end of a cooking programme. ■ Switch the oven back on.
Cakes and biscuits are not cooked properly after following the times given in the chart.	A different temperature from the one given in the recipe was used. ■ Select the temperature required for the recipe. The ingredient quantities are different from those given in the recipe. ■ Double check the recipe. The addition of more liquid or more eggs makes a moister mix which would take longer to cook.
Browning is uneven.	The wrong temperature or shelf level was selected. ■ There will always be a slight unevenness. If the unevenness is pronounced, check that the correct temperature and shelf level have been selected. The material or colour of the baking tin is not suitable for the oven function. ■ With Conventional heat  light coloured, shiny tins are less suitable. Use matt, dark coloured tins.

Problem	Possible cause and remedy
The oven lighting switches off after a short time.	The oven lighting is set to switch off after 15 seconds (default setting). You can change the default setting for this (see "Settings - P 7").
The oven lighting does not switch on.	The halogen lamp needs replacing. Danger of burning. Make sure the oven heating elements are switched off and cool. ■ Disconnect the appliance from the mains.  ■ Turn the lamp cover a quarter turn anti-clockwise to release it and then pull it together with its seal downwards to take it out. ■ Replace it with a new halogen lamp (Osram 66725 AM/A, 230 V, 25 W, G9). ■ Refit the lamp cover together with its seal and turn clockwise to secure. ■ Reconnect the oven to the electricity supply.

After Sales / Guarantee

After sales service

In the event of any faults which you cannot easily remedy yourself or if the appliance is under guarantee, please contact

– your Miele Dealer

or

– the Miele Service Department

See end of this booklet for contact details.

When contacting contacting your Dealer or Miele, please quote the model and serial number of your appliance.

This information is given on the data plate, visible on the front frame of the oven, with the door fully open.

Please note that telephone calls may be monitored and recorded for training purposes.

N.B. A call-out charge will be applied to service visits where the problem could have been resolved as described in these instructions.

Guarantee: U.K.

In the U.K, the appliance is guaranteed for 2 years from the date of purchase.

However, you must activate your cover by calling 0330 160 6640 or registering online at www.miele.co.uk.

Guarantee: Other countries

For information on the appliance guarantee specific to your country please contact Miele. See end of this booklet for contact details.



Danger of injury.

All electrical work should be undertaken by a suitably qualified and competent person.

Installation, repairs and other work by unqualified persons could be dangerous. Miele cannot be held liable for unauthorised work.

Ensure power is not supplied to the appliance until after installation or repair work has been carried out.

Connection of this appliance to the electricity supply must be made in accordance with current safety regulations (BS 7671 in the UK).

Connection of this appliance should be made via a fused connection unit or a suitable isolator and the on/off switch should be easily accessible after the appliance has been built in.

If the switch is not accessible after installation (depending on country) an additional means of disconnection must be provided for all poles.

When switched off there must be an all-pole contact gap of 3 mm in the isolator switch (including switch, fuses and relays according to EN 60335).

Connection data

The required connection data are given on the data plate located on the oven trim visible when the door is open.

Ensure that these match the mains supply.

When contacting Miele, please quote the following:

- Model number
- Serial number
- Connection data (voltage/frequency/maximum connected load)

When replacing the cable supplied with another cable or changing the connection, only cable type H05VV-F with a suitable cross-sectional area (CSA) may be used (available from Miele Spare Parts).

Oven

This oven is supplied with an approx. 1.7 m long 3-core cable for connection to a 230 V, 50 Hz supply.

The wires in the mains lead are coloured as follows:
Green/yellow = earth;
Blue = neutral;
Brown = live

WARNING, THIS APPLIANCE MUST BE EARTHED


For extra safety it is advisable to protect the appliance with a suitable residual current device (RCD).
Maximum connected load: see data plate.

Building-in diagrams

Appliance and niche dimensions

Dimensions are given in mm.


Installation in a base unit

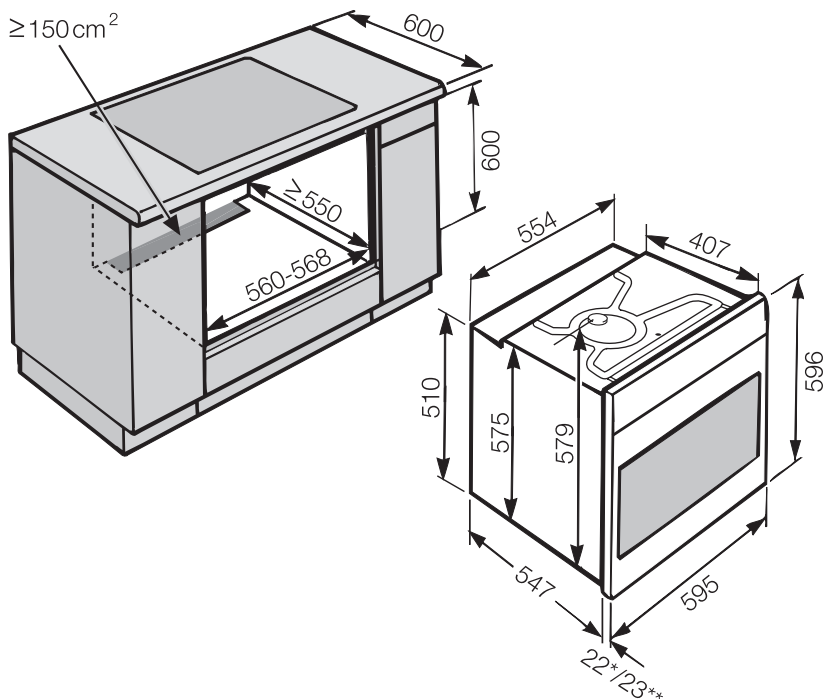

* Ovens with glass front

** Ovens with metal front

Installation in a tall unit

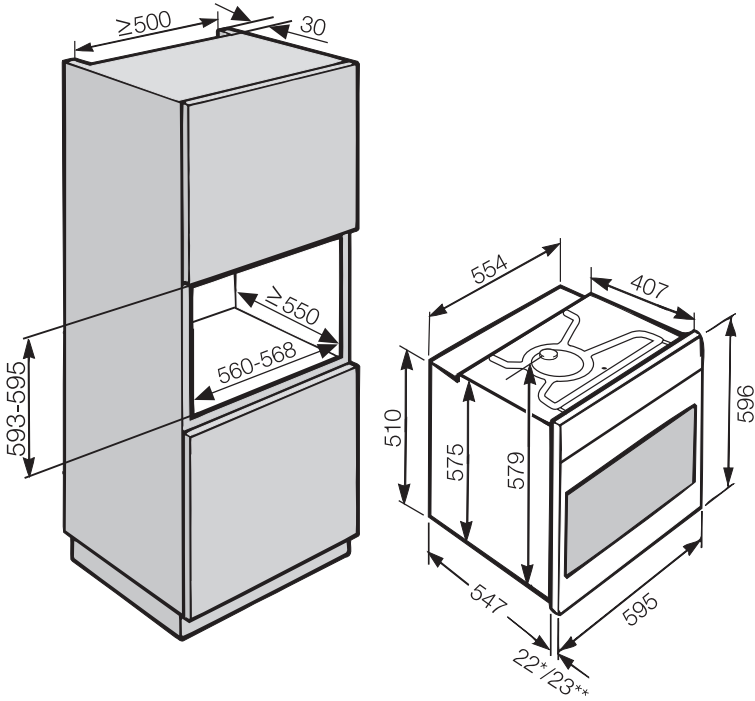


* Ovens with glass front

** Ovens with metal front

Building-in diagrams

Front dimensions

Dimensions are given in mm.

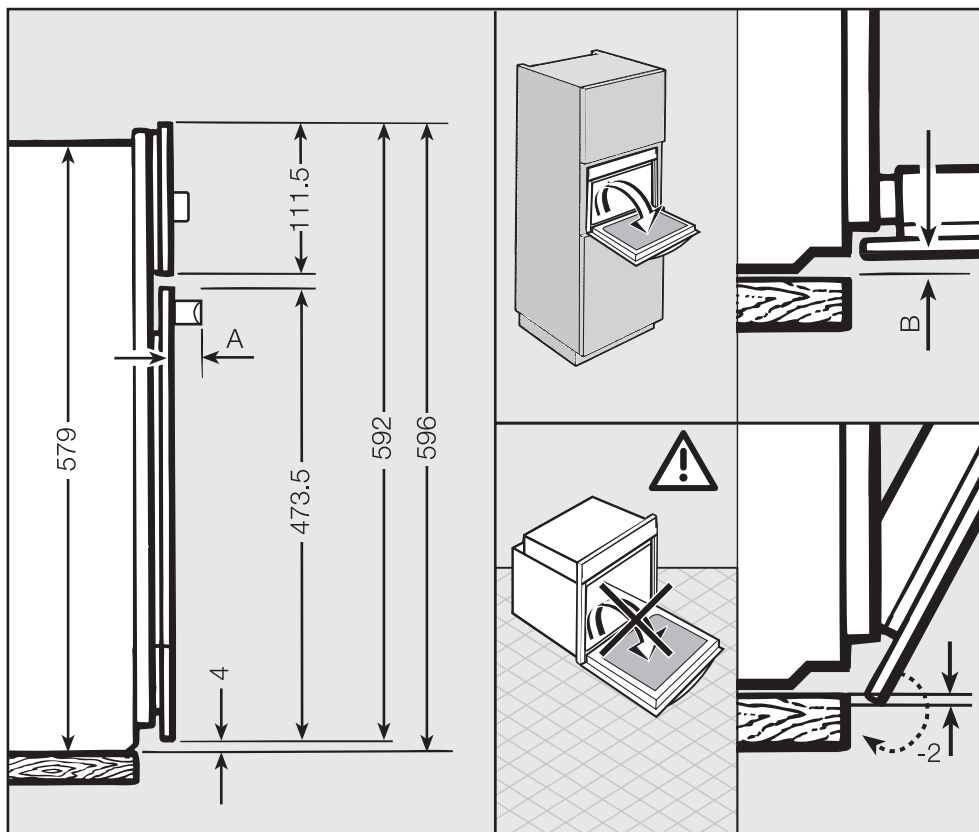

A H61xx: 45 mm
H62xx: 42 mm

B Ovens with glass front: 2.2 mm
Ovens with metal front: 1.2 mm

 The oven must not be operated until it has been correctly installed in its housing unit.

In order to function correctly, the oven requires an adequate supply of cool air.

Ensure that the supply of cool air is not impaired:


- do not fit a back panel in the housing unit.
- the unit shelf on which the oven sits must not touch the wall behind it.
- do not fit insulation to the side walls of the housing unit.

Please also ensure that the cool air supply is not unduly heated by other heat sources such as a wood burning stove.

Lifting the oven by the door handle can damage the door. Use the handle recesses on the side of the casing.

It is advisable to dismantle the door before installing the appliance (see "Cleaning and Care - Dismantling the door") and remove accessories from the oven cavity. This will make it easier to install in its niche and you will not be tempted into using the handle to carry it.

- Push the oven into the housing unit and align it.
- Open the door (if you have not removed it previously).

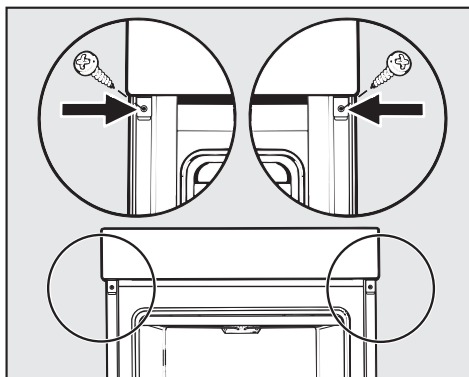

Before installation

- Before connecting the appliance to the mains, you must disconnect the power supply to the isolator switch.

Building in

- Connect the mains cable from the oven to the isolator.

- Use the screws supplied to secure the oven to the side walls of the housing unit through the holes in the oven trim.
- Refit the door, if necessary (see "Cleaning and care - Refitting the door").

Recipes

Bake-off products

Bread rolls (frozen/part-baked, unchilled)/Salted pretzels (frozen)

Ingredients

Frozen or unchilled part-baked rolls or deep frozen salted pretzels

Method for "rolls"

Place rolls on the baking tray or on the rack.

Method for "pretzels"

Place the pretzels on a baking tray covered with baking parchment.

Leave to thaw for 10 minutes and then scatter with rock salt.

Setting

According to packet instructions	Pre-heating not required	Pre-heating required
Oven function	Moisture plus 	
Temperature	See packet instructions for Fan heat	
Pre-heat	No	Yes
Shelf level	2	
Number/type of bursts of steam	1/automatic	1/manual
Amount of water	approx. 150 ml	
1st burst of steam	Automatic	After placing food in oven
Duration	As per packet instructions plus approx. 5 minutes	

Tips

Thanks to the PerfectClean finish, baking and universal trays do not need to be greased or lined with baking paper unless you are baking items with a high sodium content like pretzels, and items with a lot of sugar and egg white such as sponge mixes, macaroons and meringue.

Croissants

Ingredients

Croissants

Method

Prepare and roll out the dough according to the packet instructions, then place the croissants on a baking tray.

Setting

According to packet instructions	Pre-heating not required
Oven function	Moisture plus 
Temperature	See packet instructions for Fan heat
Shelf level	2
Number/type of bursts of steam	1/manual
Amount of water	approx. 150 ml
1st burst of steam	3 minutes after starting the programme
Duration	As per packet instructions plus approx. 5 minutes

Recipes

White bread

Ingredients

1/2 cube of fresh yeast (21 g)
250 ml lukewarm water
500 g strong white flour
1 1/2 tsp salt
1 1/2 tsp sugar
20 g softened butter

For glazing

Milk

Method

Dissolve the yeast in lukewarm water. Then add to the flour, salt, sugar and butter and knead for 4–5 minutes until you get a smooth dough.

Shape the dough into a ball. Cover and prove in the oven for 30 minutes using Conventional heat at 35 °C.

Lightly knead the dough and shape into a loaf approx. 25 cm long. Place on a baking tray then make a few diagonal cuts about 1 cm deep in the top using a sharp knife. Place in the oven and prove for 15-20 minutes using Conventional heat at 35 °C.

Brush the top with water and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	/
Temperature	170–190 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	35–45 minutes

Flat bread

Ingredients

1 cube of fresh yeast (42 g)
200 ml lukewarm water
375 g strong white flour
1 tsp salt
2 tbsp oil

For drizzling

1 1/2 tbsp oil

Method

Dissolve the yeast in lukewarm water. Then add to the flour, salt and oil and knead for 3–4 minutes until you get a smooth dough. Cover and prove in the oven for 20–30 minutes using Conventional heat at 35 °C.

Lightly knead the dough then roll it out to the shape you want (Ø approx. 25 cm). Place on a baking tray, cover and leave to prove for a further 10 minutes at room temperature.

Drizzle with oil and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	25–30 minutes

Tips

For a variation of this flat bread, knead one of the following into the dough: 50 g of fried onions; 2 tsp of chopped rosemary; or a mixture of 40 g chopped black olives and 1 tbsp chopped pine nuts or 1 tsp chopped herbs de Provence. Sprinkle the top with black sesame seed and bake.

Recipes

Herb bread

Ingredients

- 1/2 cube of fresh yeast (21 g)
- 300 ml milk, lukewarm
- 500 g strong white flour
- 1 tsp salt
- 1 tbsp coarsely chopped parsley
- 1 tbsp coarsely chopped fresh dill
- 1 tbsp coarsely chopped chives

For glazing

Milk

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, salt and herbs and knead for 3-4 minutes until you get a smooth dough. Cover the dough and place in the oven to prove for 30-40 minutes using Conventional heat at 35 °C.

Place the dough in a greased loaf tin (approx. 30 cm). Slash the top of the dough in a criss-cross pattern with a sharp knife. Place in the oven and prove for 15-20 minutes using Conventional heat at 35 °C.

Brush the top with milk and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150–170 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	50–60 minutes

Olive bread

Ingredients

450 g strong white flour
 1/2 cube of fresh yeast (21 g)
 150 ml white wine
 4 eggs
 50 g olive oil
 100 g ham, finely diced
 100 g grated pecorino cheese
 1 tsp dried marjoram
 1/2–1 tsp salt
 100 g chopped walnuts
 100 g black olives, coarsely chopped

Method

Knead the flour, yeast, wine, eggs and oil to a smooth dough, cover and prove for 50–60 minutes using Conventional heat at 35 °C.

Then mix the ham, cheese, marjoram and salt and knead into the dough with the chopped walnuts. Finally knead in the coarsely chopped olives.

Place the very soft dough into a greased loaf tin (approx. 30 cm), cover and place in the oven. Prove for 50–60 minutes using Conventional heat at 35 °C. Slash the top of the loaf lengthways and then bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	65–75 minutes

Recipes

Sesame cheese rolls

Makes 10

Ingredients

- 1 cube of fresh yeast (42 g)
- 150 ml milk, lukewarm
- 500 g strong white flour
- 1 heaped tsp salt
- 1 pinch of sugar
- 75 g melted butter
- 40 g Parmesan cheese, finely grated
- 2 eggs
- 6 tbsp sesame seeds

For glazing

- 1 egg

Top with

- 120 g shaved Cheddar, Cheshire or Gouda cheese

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt, butter, parmesan and egg and knead for 3 - 4 minutes until you get a smooth dough. Cover and place in the oven to prove for 20 - 30 minutes on Conventional heat at 35°C.

Shape the dough into 10 evenly sized balls and place on a baking tray lined with baking parchment. Cover and prove for a further 10-15 minutes in the oven using Conventional heat at 35 °C.

Press the bottom of each roll into the sesame seeds. Brush the tops with the beaten egg and sprinkle generously with cheese. Place in the oven and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	150–170 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–30 minutes

Tips

You can also top the rolls with sesame seeds in addition to the cheese.

Rye bread

Ingredients

400 g rye flour
200 g strong white flour
2 1/2 tsp salt
2 tsp honey
150 g liquid sourdough
1 cube of fresh yeast (42 g)
400 ml lukewarm water
5 tbsp linseeds
4 tbsp sunflower seeds

For glazing

Water

Method

Mix the strong white flour with the rye flour and the salt. Then add the sourdough and the honey.

Dissolve the yeast in the lukewarm water and add it to the flour. It is best to knead this heavy dough in a kitchen mixer using dough hooks for about 4 minutes. Cover and prove for 30–45 minutes in the oven using Conventional heat at 35 °C.

Knead in the linseeds and the sunflower seeds. Place the dough in a greased loaf tin (approx. 30 cm). Level the top and brush with water and prove for a further 15–20 minutes in the oven using Conventional heat at 35 °C.

Bake in the pre-heated oven until golden. The oven temperature should be reduced after the first 15 minutes.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	200 °C + pre-heating after 15 minutes: 180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	After placing food in oven
2nd burst of steam	After another 10 minutes
Duration	50–60 minutes

Recipes

Mixed grain bread

Ingredients

- 1/2 cube of fresh yeast (21 g)
- 1 tbsp malt extract
- 400 ml lukewarm water
- 200 g rye flour
- 400 g strong white flour
- 3 tsp salt
- 75 g liquid sourdough

For glazing

Water

Method

Dissolve the yeast and malt extract in lukewarm water.

Mix the rye flour, strong white flour and salt and then add the sourdough. Add the malted water and knead for about 4 minutes until you get a smooth dough. Place in the oven and prove for 40–45 minutes using Conventional heat at 35 °C.

Lightly knead the dough again, then place it in a greased loaf tin (approx. 30 cm). Level the top then brush with water, cover and place in the oven. Prove for a further 25–30 minutes using Conventional heat at 35 °C.

Then slash the surface lengthways with a sharp knife and bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	190 - 210 °C + pre-heating
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	After placing food in oven
2nd burst of steam	After another 10 minutes
Duration	45–55 minutes

Yeast rolls

Makes 10

Ingredients

1/2 cube of fresh yeast (21 g)
250 ml lukewarm water
500 g strong white flour
1 1/2 tsp salt
1 tsp sugar
1 heaped tsp softened butter

Method

Dissolve the yeast in lukewarm water. Then add to the flour, salt, sugar and softened butter and knead for 3–4 minutes until you get a smooth dough. Cover and prove for 35–45 minutes in the oven using Conventional heat at 35 °C.

Lightly knead the dough again, shape into 10 equally sized balls and place on a baking tray or a perforated baking tray. Cover and prove in the oven for a further 10 minutes using Conventional heat at 35 °C.

Brush with water and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	190–210 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–30 minutes

Tips

For milk rolls use 300 ml milk instead of water. For raisin rolls use 300 ml milk instead of water and add 2 tbsp sugar and knead 100 g raisins into the dough.

Recipes

Seeded rolls

Makes 10

Ingredients

- 1 cube of fresh yeast (42 g)
 - 1 tsp molasses
 - 1 tbsp malt extract
 - 300 ml lukewarm water
 - 150 g dark rye flour
 - 450 g strong white flour
 - 2–3 tsp salt
 - 75 g sourdough
- Top with**
- 3 tbsp each of linseeds, sesame seeds and sunflower seeds

Method

Dissolve the yeast together with the molasses and malt extract in lukewarm water.

Mix the rye flour, strong white flour and salt and then add the sourdough. Add the malted water and knead until you get a smooth dough. Cover and place in the oven to prove for approx. 45 minutes using Conventional heat at 35 °C.

Mix the linseeds with the sesame seeds and the sunflower seeds.

Lightly knead the dough and shape into 10 rolls. Brush the rolls with water and dip the tops into the seeds. Place the rolls on a baking tray or a perforated baking tray. Cover and place in the oven to prove for a further 45 minutes approx. using Conventional heat at 35 °C. Then bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	190–210 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–30 minutes

Tips

For a spicy variation add 1/2 tsp mixed spices (e.g. star anise, coriander and cumin).

Italian mozzarella bread

Dough ingredients

1 cube of fresh yeast (42 g)
200 ml lukewarm water
500 g strong white flour
1 tsp salt
3 tbsp olive oil

Topping ingredients

125 g diced mozzarella
100 g coarsely grated Pecorino
2 cloves of garlic, finely chopped
2 tbsp basil, chopped

For glazing

Olive oil

Top with

1 tsp coarse grained salt
Some sprigs of rosemary
1 tsp coloured, coarsely ground pepper

Method

Dissolve the yeast in lukewarm milk. Then add to the remaining ingredients and knead to a smooth pliable dough. Cover and place in the oven for about 45 minutes to prove using Conventional heat at 35 °C.

Lightly knead the dough and roll out into a rectangle (30 x 40 cm). Top with mozzarella, pecorino, garlic and basil then roll up from the shorter side. Place the roll on a baking tray or perforated baking tray. Cover and place in the oven to prove for a further 15 minutes approx. using Conventional heat at 35 °C.

Slash the top of the loaf through to at least the second layer with a sharp knife. Brush the dough with olive oil, sprinkle with salt, rosemary and pepper and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	170–190 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	After placing food in oven
2nd burst of steam	After another 10 minutes
Duration	35–45 minutes

Tips

For an alternative you could also add 100 g finely chopped bottled sundried tomatoes or 100 g of sliced black olives before rolling the dough up.

Recipes

Sunday rolls

Makes 8

Ingredients

- 1/2 cube of fresh yeast (21 g)
- 250 ml milk, lukewarm
- 500 g strong white flour
- 40 g sugar
- A pinch of salt
- 60 g softened butter
- 100 g chopped almonds

For glazing

Milk

Top with

Crystal sugar

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt and butter and knead until you get a smooth dough. Cover and place in the oven to prove for approx. 30 minutes using Conventional heat at 35 °C.

Knead the chopped almonds into the dough and form into 8 rolls. Place on a baking tray or a perforated baking tray. Cover, place in the oven and prove for a further 20–30 minutes using Conventional heat at 35°C.

Brush with milk and sprinkle crystal sugar on top. Bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	150–170 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
2nd burst of steam	After another 10 minutes
Duration	35 - 40 minutes

Buttermilk bread

Ingredients

1/2 cube of fresh yeast (21 g)
 300 ml lukewarm buttermilk
 375 g strong white flour
 100 g rye flour
 1 tbsp wheat bran
 1 tbsp linseeds
 1 tsp sugar
 2 tsp salt
 1 tsp butter

For glazing

Buttermilk

Method

Dissolve the yeast in lukewarm milk. Then add to the white flour, rye flour, wheat bran, linseeds, sugar, salt and butter and knead to a soft, smooth dough. Cover the dough and place in the oven to prove for approx. 30 minutes using Conventional heat at 35 °C.

Lightly knead the dough then shape into a long loaf. Place in a greased loaf tin (approx. 30 cm). Cover and prove for a further 20–30 minutes in the oven using Conventional heat at 35 °C.

Slash the top of the loaf, brush with buttermilk and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	170 - 180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	45–55 minutes

Recipes

Chocolate breakfast rolls

Makes 8

Ingredients

- 1 cube of fresh yeast (42 g)
- 150 ml milk, lukewarm
- 500 g strong white flour
- A pinch of salt
- 60 g sugar
- 2 tsp vanilla sugar
- 75 g softened butter
- 2 eggs
- 100 g chocolate drops

For glazing

Milk

Method

Dissolve the yeast in the lukewarm milk. Then add to the flour, salt, sugar, vanilla sugar, butter and eggs and knead until you get a smooth dough. Cover and prove in the oven for about 30 minutes using Conventional heat at 35 °C.

Knead the chocolate drops into the dough and form into 8 rolls. Place on a baking tray or a perforated baking tray. Cover, place in the oven and prove for a further 15-20 minutes using Conventional heat at 35 °C.

Brush with milk.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150–160 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	25–35 minutes

Onion flat bread

Dough ingredients

1 cube of fresh yeast (42 g)
200 ml lukewarm water
375 g strong white flour
1 tsp salt
2 tbsp oil

Topping ingredients

2 small red onions
100 g strong cheese
Thyme

For drizzling

2 tbsp oil

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	25–30 minutes

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, salt and oil and knead for 3–4 minutes until you get a smooth dough. Cover the dough and place in the oven to prove for about 45 minutes using Conventional heat at 35 °C.

Punch the dough down and roll out into the shape of a flat bread (Ø approx. 30 cm). Place on a baking tray, cover and leave to prove at room temperature for another 10 minutes.

Peel and finely slice the onions. Grate the cheese.

Scatter the onions on the flat bread, spread with the cheese and thyme, drizzle with oil around the edges and bake until golden.

Recipes

Quark rolls

Makes 10

Ingredients

- 250 g low fat quark
- 2 eggs
- 70 g sugar
- 2 tsp vanilla sugar
- A pinch of salt
- 500 g plain flour
- 25 g baking powder (approx. 7 tsp)
- 100 g chopped walnuts

For glazing

Milk

Top with

Sugar

Method

Mix the quark, eggs, sugar, vanilla sugar and salt. Then sieve the flour and baking powder and gradually add to the quark mix together with the chopped walnuts.

Knead the dough by hand until it is smooth and soft. Add a little more flour if it gets sticky.

Shape the dough into 10 evenly sized balls. Brush with milk, dip in sugar and place on a baking tray or a perforated baking tray. Place in the pre-heated oven.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	150–170 °C + pre-heating
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–35 minutes

Tips

Homemade vanilla sugar: Cut a vanilla pod in half lengthways and cut each half into 4-5 pieces. Place in a lidded glass jar with 500 g of sugar and leave for 3 days to absorb the flavour. For an even more intensive flavour scrape the pulp out of the vanilla pod and add this to the sugar.

Buttermilk loaf

Ingredients

1 cube of fresh yeast (42 g)
 240 ml lukewarm buttermilk
 500 g strong white flour
 100 g sugar
 A pinch of salt
 20 g melted butter
 125 g low fat quark
 250 g raisins

For glazing

Water

Method

Dissolve the yeast in lukewarm buttermilk. Then add to the flour, sugar, salt, butter and quark and knead until you get a smooth dough. Cover and place in the oven to prove for 25–35 minutes using Conventional heat at 35 °C.

Knead in the raisins then place the dough in a greased loaf tin (approx. 30 cm). Cover and place in the oven to prove for approx. 20–30 minutes using Conventional heat at 35 °C.

Brush the top with water and then bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	/
Temperature	150–170 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
Duration	55 - 65 minutes

Recipes

Malted pumpkin seed rolls

Makes 8

Ingredients

- 1 cube of fresh yeast (42 g)
- 1 tbs malt extract
- 300 ml lukewarm water
- 500 g strong wholemeal flour
- 3 tsp salt
- 50 g pumpkin seeds, chopped

Method

Dissolve the yeast and malt extract in lukewarm water. Then add to the flour, salt and chopped pumpkin seeds and knead to a smooth dough. Cover and place in the oven to prove for approx. 40 minutes using Conventional heat at 35 °C.

Lightly knead the dough again and shape into 8 rolls. Brush with a little water, then cut a cross into the top of each and place on a baking tray or a perforated baking tray. Cover and place in the oven to prove for approx. a further 30–40 minutes using Conventional heat at 35 °C.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	1
Temperature	190–210 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–30 minutes

Tips

Malt helps speed up the rate that yeast grows at. It also gives bread and rolls a pleasant sweet taste and a nice dark colour. It is available from health food shops and most supermarkets.

Yeast dough men

Makes 4

Ingredients

1/2 cube of fresh yeast (21 g)

200 ml milk, lukewarm

375 g strong white flour

50 g sugar

A pinch of salt

50 g softened butter

For glazing

1 egg

To decorate

Raisins

Almonds

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	20 - 30 minutes

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt and butter and knead until you get a smooth dough. Cover and place in the oven to prove for approx. 30 minutes using Conventional heat at 35 °C.

Lightly knead the dough again. Dust the worksurface with flour, then roll the dough out about 1 cm thick and cut into dough men shapes. Place the dough men on a baking tray or a perforated baking tray. Cover and place in the oven to prove for approx. a further 15–20 minutes using Conventional heat at 35 °C.

Whisk the egg, brush on dough men, decorate with raisins and almonds and bake until golden.

Recipes

Yeast pretzels

Makes 8

Ingredients

- 1/2 cube of fresh yeast (21 g)
- 100 ml milk, lukewarm
- 300 g strong white flour
- 1 tsp sugar
- 1 tsp salt
- 30 g butter
- 1 egg

For glazing

- 1 egg yolk beaten into
- 1 tbsp milk

Top with

- Poppy seeds or grated cheese

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	20 - 30 minutes

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt, butter and egg and knead until you get a smooth dough. Cover and place in the oven to prove for 20 - 30 minutes using Conventional heat at 35 °C.

Lightly knead the dough again and roll into 8 lengths (Ø approx. 0.5 cm). Then shape into pretzels and place on a baking tray or a perforated baking tray. Cover and prove in the oven for a further 10 minutes using Conventional heat at 35 °C.

Brush with the egg yolk and milk, then sprinkle with poppy seeds or grated cheese. Bake until golden.

Bacon or herb baguettes

Makes 2

Ingredients

1 cube of fresh yeast (42 g)
 250 ml lukewarm water
 250 g strong white flour
 250 g strong wholemeal flour
 1 tsp sugar
 2 tsp salt
 1/2 tsp pepper
 3 tbsp oil
 150 g finely diced cooked ham or
 bacon, or 3 tbsp each of chopped
 parsley, dill and chives

For glazing

Milk

Method

Dissolve the yeast in lukewarm water. Then add to the white flour, wholemeal flour, sugar, salt, pepper and oil and knead for 3–4 minutes until you get a smooth dough. Cover and prove in the oven for 40–50 minutes using Conventional heat at 35 °C.

Fold in the diced ham or bacon or the herbs. Shape the dough into two approx. 35 cm long baguettes and place them on a baking tray or a perforated baking tray. Make diagonal slashes in the top of the baguettes, cover and prove in the oven for a further 15–20 minutes using Conventional heat at 35 °C.

Brush the baguettes with milk and then bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	190–210 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–35 minutes

Recipes

Ham and cheese rolls

Makes 8

Ingredients

- 1/2 cube of fresh yeast (21 g)
- 250 ml lukewarm water
- 500 g strong white flour
- 30 g butter
- 1/2 tsp salt
- 100 g cooked ham, finely diced
- 100 g strong cheese, grated

For glazing

Water

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, salt and butter and knead until you get a smooth dough. Cover the dough and place in the oven to prove for about 30 minutes using Conventional heat at 35°C.

Knead the ham and half of the grated cheese into the dough.

Shape the dough into 8 rolls and place on a baking tray or a perforated baking tray. Cover and prove for a further 15–20 minutes in the oven using Conventional heat at 35 °C.

Brush the rolls with water and top with the rest of the cheese. Bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	I
Temperature	170–190 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	25–30 minutes

Tips

Instead of Cheddar cheese try making these rolls with Emmental, Gruyere or a mature Gouda cheese.

Apricot loaf

Ingredients

1 cube of fresh yeast (42 g)
 200 ml milk, lukewarm
 500 g strong white flour
 60 g sugar
 1 tbsp. vanilla sugar
 A pinch of salt
 1 tsp grated lemon zest
 100 g softened butter
 1 egg
 100 g dried apricots
 50 g chopped pistachio nuts

For glazing

Milk

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, vanilla sugar, salt, lemon zest, butter and egg and knead until you get a smooth dough. Cover the dough and place in the oven to prove for about 30 minutes using Conventional heat at 35 °C.

Dice the apricots and knead into the dough with the pistachios. Shape into a loaf and place in a greased loaf tin (approx. 30 cm long). Cover and place in the oven to prove for a further 15 minutes using Conventional heat at 35 °C.

Glaze the apricot loaf with milk and then bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150 - 170 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	50–60 minutes

Recipes

Butter cake

Makes 20 slices

Dough ingredients

- 1 cube of fresh yeast (42 g)
- 200 ml milk, lukewarm
- 500 g strong white flour
- 50 g sugar
- A pinch of salt
- 50 g butter
- 1 egg

Topping ingredients

- 100 g butter
- 100 g flaked almonds
- 120 g sugar
- 4 tsp vanilla sugar

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt, butter and egg and knead until you get a smooth dough. Cover and place in the oven to prove for approx. 20 minutes using Conventional heat at 35 °C.

Punch down and then roll out onto a universal tray. Cover and prove for another 20 minutes in the oven using Conventional heat at 35 °C.

Mix the butter with the vanilla sugar and half of the sugar. Make indentations in the dough with your fingers and then, using two teaspoons, drop small balls of the mixture into the indentations. Sprinkle the remaining sugar and flaked almonds over the top.

Allow to prove for another 10 minutes and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	25–30 minutes

Pine nut and almond cake

Makes 20 slices

Dough ingredients

30 g yeast
200 ml milk, lukewarm
500 g strong white flour
80 g sugar
A pinch of salt
80 g softened butter
1 egg

Topping ingredients

150 g butter
200 g sugar
2 tbsp honey
3 tbsp double cream
100 g chopped pine nuts
100 g flaked almonds

Filling ingredients

1 packet of vanilla custard powder
500 ml milk
3 tbsp sugar
A pinch of salt
250 g softened butter

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt, butter and egg and knead until you get a smooth dough. Cover and place in the oven to prove for approx. 30 minutes using Conventional heat at 35 °C.

Punch down and then roll out onto a universal tray. Cover and prove for another 20 minutes in the oven using Conventional heat at 35 °C.

To make the topping heat the butter, sugar, honey and cream in a pan on the hob and bring to the boil. Add the chopped pine nuts and sliced almonds.

Leave to cool. Make indentations in the dough with your fingers and then spread the cooled topping smoothly over the dough. Prove the cake for another 10 minutes and then bake until golden.

Make the filling by heating up the vanilla custard powder with the milk, sugar and salt. Leave to cool. In the meantime cream the butter and then stir the pudding mix into it a spoonful at a time.

Cut the cake through the middle when it has cooled down. Spread the bottom layer with the filling and then carefully place the top layer on the filling. Leave to chill before serving.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	25–30 minutes

Recipes

Plaited walnut loaf

Makes 10 slices

Ingredients

- 1 cube of fresh yeast (42 g)
- 150 ml milk, lukewarm
- 500 g strong white flour
- 50 g sugar
- 2 tsp vanilla sugar
- A pinch of salt
- 100 g softened butter
- 1 egg
- 100 g chopped walnuts

For glazing

Milk

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	160–180 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	30–40 minutes

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, vanilla sugar, salt, butter and egg and knead until you get a smooth dough. Cover the dough and place in the oven to prove for about 30–40 minutes using Conventional heat at 35 °C.

Knead the chopped walnuts into the dough. Shape the dough into 3 rolls, approx. 40 cm long. Plait the 3 rolls and place the loaf on a baking tray or a perforated baking tray. Cover and prove in the oven for a further 20 minutes using Conventional heat at 35 °C.

Brush the loaf with milk and bake.

Cinnamon and macadamia ring

Makes 10 slices

Dough ingredients

1 cube of fresh yeast (42 g)

100 ml milk, lukewarm

500 g strong white flour

100 g sugar

A pinch of salt

Grated zest of 1 lemon

100 g softened butter

1 egg

2 egg whites

Topping ingredients

2 tsp ground cinnamon

2 tbsp sugar

100 g unsalted, chopped macadamia nuts

2 egg yolks

For glazing

Milk

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt, lemon zest, butter and egg white and knead until you get a smooth dough. Cover and place in the oven to prove for about 30 minutes using Conventional heat at 35°C.

Lightly knead the dough and divide into two. Shape each half in 50–60 cm long rolls and twist them together to form a ring.

Place the ring on a baking tray or a perforated baking tray. Cover and prove in the oven for a further 20 minutes using Conventional heat at 35 °C.

Mix the cinnamon with the sugar, chopped nuts and the egg yolks. Brush with the milk, sprinkle with the nut mixture and prove for another 15 - 20 minutes using Conventional heat at 35 °C. Bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150–170 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	30–35 minutes

Tips

Macadamia nuts originate from Australia and are one of the most expensive nuts in the world. This queen of nuts is rich in unsaturated fat, which gives it its soft creamy taste.

Recipes

"Verduras" sea bream

Serves 4

Ingredients

4 prepared sea bream (approx. 400 g each)
800 g small potatoes
2 red peppers
2 green courgettes
2 yellow courgettes
4 shallots
3 cloves of garlic
400 g goat's cheese
Juice of one lemon
Salt
Lemon pepper
4 sprigs of thyme
4 sprigs of rosemary
10 tbsp olive oil

Method

Parboil the potatoes, in their skins for about 10 minutes.

Halve, trim and chop up the peppers. Slice the courgettes and cut the shallots into wedges. Peel and finely chop the garlic, Dice the cheese.

Rinse the fish, pat dry, drizzle with lemon juice, season with salt and lemon pepper and put in a large gourmet oven dish or in the universal tray.

Mix the parboiled potatoes with the vegetables and herbs and season with salt and lemon pepper. Arrange around the fish and scatter the goat's cheese over the vegetables.

Season the oil with salt and pepper and drizzle over the fish, potatoes and vegetables then cook in the oven.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	30–40 minutes

Tips

Baby new potatoes with a diameter of 25-40 mm cooked in their skins are good with this recipe.

Savoy cabbage and salmon gratin

Serves 4

Ingredients

600 g salmon fillet
1 small savoy cabbage (approx. 600 g)
20 g softened butter
500 g potatoes
Pepper
Salt
300 g crème fraîche with herbs
2–3 tsp horseradish sauce
80 g grated cheddar cheese
80 g white bread

Method

Wash and quarter the cabbage, remove the stalk and shred the leaves. Heat the butter in a frying pan, add the cabbage and fry gently for 15 minutes, stirring occasionally.

Peel and slice the potatoes. Parboil for 5 minutes.

Wash and dry the salmon, cut into strips approx. 2 cm wide. Season with salt and pepper. Mix the crème fraîche with the horseradish sauce and the cheese.

Mix the cabbage with the potatoes and place in an ovenproof dish (approx. 20 x 30 cm). Arrange the salmon on top. Dice the bread and stir into the crème fraîche. Spread the bread mixture over the top of the salmon and bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	160–180 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
3rd burst of steam	After another 10 minutes
Duration	35–45 minutes

Recipes

Stuffed salmon trout

Serves 4

Ingredients

- 2 salmon trout (600–700 g each)
- Juice of one lemon
- Salt
- 2 shallots
- 2 cloves of garlic
- 50 g small capers
- 1 egg yolk
- 2 tbsp olive oil
- 2 slices of white bread
- Chilli powder
- Pepper, freshly ground

Method

Rinse the salmon trout, pat dry, drizzle with lemon juice inside and out and season with salt and pepper.

Peel and finely dice the shallots and garlic. Dice the white bread. Mix together the capers, egg yolk, shallots, garlic, oil and bread and season with salt, pepper and chilli powder.

Stuff the fish with this mixture and seal the opening with small wooden skewers.

Place the fish in the universal tray and cook in the oven.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	30–40 minutes

Viennese fillet of fish

Serves 4

Ingredients

3 salmon trout fillets, 200 g each
 Juice of one lemon
 125 g crème fraîche
 50 g pickled gherkins
 10 g capers
 30 g streaky bacon
 1 tbsp mustard
 1 tsp grated Parmesan cheese

Method

Rinse the fish fillet, pat dry and drizzle with lemon juice. Place one fillet in a greased casserole dish (20 x20cm) and coat with half of the crème fraîche.

Rinse the gherkins and capers. Then dice the bacon and the gherkins and mix with the chopped up capers.

Place a third of the gherkin mixture on top of the fish fillet. Then place a second fillet on top. Coat with mustard and another third of the gherkin mixture.

Top this with the last fish fillet, coat with the remaining crème fraîche and then the rest of the gherkins. Scatter Parmesan over the top and bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	30–40 minutes

Recipes

Salmon and spinach pasta bake

Serves 4

Ingredients

- 450 g fresh or frozen spinach (defrosted)
- 1 clove of garlic
- Salt
- Nutmeg
- 500 g green tagliatelli
- 400 g salmon fillet
- 1-2 tbsp lemon juice
- Pepper, freshly ground
- 200 ml double cream
- 250 g sour cream
- 2 tbsp mixed Italian herbs
- 20 g flaked almonds

Method

Blanch fresh spinach in boiling water for 1 minute then drain well. Squeeze any excess water out by hand.

Roughly chop the spinach and season with salt and a little nutmeg.

Cook the tagliatelle to "al dente".

Rinse the salmon, pat dry, dice coarsely, drizzle with lemon juice and season with salt and pepper.

Mix the cream with the sour cream and herbs and season with salt and pepper.

Place the tagliatelle in a greased oven-proof dish (approx. 20 x 30 cm), and arrange the spinach and diced salmon on top. Pour the sauce over the top, sprinkle with the sliced almonds and bake uncovered.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	160–180 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
3rd burst of steam	After another 10 minutes
Duration	35–45 minutes

Pollock delicioso

Serves 4

Ingredients

750 g pollock, filleted and skinned
 3 onions
 40 g butter
 500 g tomatoes
 Juice of 1/2 a lemon
 Salt
 Pepper
 100 ml milk
 10 g breadcrumbs
 2 tbsps chopped parsley

Method

Slice the onions finely then sauté them in half the butter. Slice the tomatoes. Pat the fish dry with kitchen paper then drizzle with lemon juice and season with salt and pepper.

Put the onions in a greased ovenproof dish (Ø 26 cm). Arrange the tomatoes on top and season with salt and pepper.

Arrange the fish on top. Melt the remaining butter, add the milk and pour over the fish. Sprinkle with breadcrumbs and bake. Before serving garnish with chopped parsley.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	30–40 minutes

Recipes

Trout stuffed with mushrooms

Serves 4

Ingredients

- 4 trout (250 g each)
- 2 tbsp lemon juice
- Salt
- Pepper
- 1/2 onion
- 1 clove of garlic
- 200 g fresh mushrooms
- 1 bunch of parsley
- 50 g butter

Method

Rinse the trout, pat dry, drizzle with lemon juice inside and out and season with salt and pepper.

Finely dice the onion and garlic, chop the mushrooms and parsley and mix well.

Fill the trout with the mixture and place them next to each other in a large gourmet oven dish or on the universal tray. Dot with butter and bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	35–45 minutes

Pikeperch with herbs

Serves 4

Ingredients

800 g pikeperch fillets
 Juice of one lemon
 1 bunch of parsley
 1 bunch of chives
 1 bunch of dill
 1 bunch of lemon balm mint
 Salt
 50 g butter

Method

Rinse the fish, pat dry and drizzle with a little lemon juice. Leave to stand for about 10 minutes. Wash the herbs, finely chop them and mix well. Arrange in the bottom of a shallow ovenproof dish.

Season the fish with salt and arrange them, overlapping each other on top of the herbs. Drizzle with the remaining lemon juice, dot with butter and bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	160–180 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	35–45 minutes

Recipes

Sweet and sour chicken

Serves 6

Ingredients

- 800 g chicken breast
- 400 g plums, stoned
- 40 g fresh ginger
- 1 small bunch of spring onions
- Salt
- Pepper
- 3 tbsp oil
- 40 g butter
- 100 ml white wine
- 100 ml orange juice
- 100 ml chicken stock
- 1 tsp honey
- 50 ml cream

Method

Peel the ginger and grate finely. Cut the spring onions into 2 cm pieces.

Season the chicken with salt and pepper. Heat the oil in a gourmet oven dish and sear the chicken briefly. Add the butter, spring onions and ginger and fry briefly.

Add the white wine, orange juice and chicken stock. Add the plums and honey and pour the cream over the chicken. Cook in the oven. Thicken the sauce if necessary using a little cornflour mixed with water.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	150 - 170 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	40 – 50 minutes

Turkey roulade with a spinach ricotta filling

Serves 6

Ingredients

1000 g turkey breast
1 shallot
225 g frozen spinach (defrosted)
1 egg yolk
2 tbsp breadcrumbs
125 g Ricotta
Salt
Pepper
Nutmeg
2 tbsp olive oil
1 tsp rosemary
750 ml chicken stock
500 ml double cream

Method

Finely dice the shallot and mix into the defrosted spinach along with the egg yolk and breadcrumbs. Season with salt, pepper and a little nutmeg.

Cut the turkey breasts lengthways but do not cut all the way through. Open out and flatten between two sheets of cling film. Season with salt and pepper and then spread the spinach-ricotta mixture over the top. Roll up and bind with kitchen string.

Season with salt and pepper and place in an ovenproof dish. Drizzle the roulades with olive oil and sprinkle the rosemary over the top. Add the stock and cook in the oven. After 60 minutes pour the cream over the top.

Take the roulades out of the sauce and remove the string. If necessary, thicken the sauce with a little cornflour mixed with water. Slice the roulades and serve with the sauce.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	170–190 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 25 minutes
3rd burst of steam	After another 25 minutes
Duration	90–100 minutes

If using the food probe, set the core temperature to 85 °C.

Recipes

Braised beef roulades

Serves 4

Ingredients

4 thin beef steaks (approx. 160–200 g)

Salt

Pepper

4 tsp medium-hot mustard

8 slices of streaky bacon

8 cocktail gherkins (cornichons)

2 carrots

1 thin leek

150 g celery

1 onion

Oil

1 tbsp tomato purée

250 ml red wine

2 sprigs of thyme

2 sprigs of rosemary

2 bay leaves

1 clove of garlic

1000 ml beef stock

100 ml cream

Method

Lay the steaks out next to each other and season with salt and pepper. Coat with mustard and then top each with 2 slices of bacon and 2 gherkins cut into batons. Roll up and secure with wooden skewers or kitchen twine. Dice the carrots, leek, celery and onions into 1 cm pieces.

Heat the oil in a gourmet oven dish and sear the roulades all round. Remove and then fry the vegetables.

Add the tomato paste and cook with the vegetables. Deglaze with a third of the red wine. When the wine is almost fully reduced add the next third and so on until the wine is totally reduced.

Add the herbs, spices and garlic together with the stock. Put the roulades back into the oven dish, cover and cook in the oven for 60 minutes.

Remove the lid after 60 minutes in the oven and release the first burst of steam. Continue cooking without the lid.

When done take the roulades out and remove the skewers or the kitchen twine. Sieve the stock, add the cream and if necessary thicken the sauce with a little cornflour mixed with water.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	140 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	60 minutes after starting the programme
2nd burst of steam	After another 20 minutes
3rd burst of steam	After another 20 minutes
Duration	120 minutes

Recipes

Braised silverside of veal

Serves 6

Ingredients

- 1500 g silverside of veal
- 2 carrots
- 1 thin leek
- 150 g celery
- 1 onion
- 1 clove of garlic
- 2 sprigs of thyme
- 2 sprigs of rosemary
- 4 bay leaves
- 5 juniper berries
- Salt
- Pepper
- 500 ml white wine
- 100 g crème fraîche
- 250 ml beef stock or water

Method

Dice the carrots, the leek and the onions (1 cm) and place in the gourmet oven dish together with the garlic, the herbs and the spices.

Season the meat with salt and pepper and place on top of the vegetables and cook.

After 25 minutes cooking deglaze with the white wine and cook the meat until done. Add water as necessary if the vegetables get too dry.

Sieve the sauce then thicken with crème fraîche and stock. Use a little cornflour mixed with water if necessary.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	210–230 °C after 25 minutes: 130–150 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 15 minutes
3rd burst of steam	After another 30 minutes
Duration	90–100 minutes

If using the food probe, set the core temperature to 75 °C.

Glazed gammon

Serves 6

Ingredients

1000 g gammon joint
20 g softened butter
40 g brown sugar
2 carrots
1 thin leek
150 g celery
1 onion
5 bay leaves
6 cloves
10 crushed juniper berries
125 ml red wine
250 ml water

Method

Score the surface of the gammon in a criss-cross pattern about 2-3 mm deep. Rub butter and sugar into the cuts.

Dice the carrots, the leek, the celery and the onion. Mix with the spices and place in the centre of the universal tray. Place the gammon joint on top. Pour the red wine and water around the gammon and cook in the oven, adding a little water if the vegetables become too dry.

Sieve the juices and thicken with a little cornflour mixed with water if necessary. Slice the gammon and serve with the gravy.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	150 - 170 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
3rd burst of steam	After another 30 minutes
Duration	70–90 minutes

If using the food probe, set the core temperature to 70 °C.

Recipes

Stuffed pork tenderloin

Serves 6

Ingredients

- 4 pork tenderloin (300 g each)
- Salt
- Pepper
- 20 basil leaves
- 250 g red pesto
- 30 g Parmesan cheese, freshly grated
- 12 slices of parma ham
- 40 g butter
- 250 ml double cream
- 250 ml meat stock

Method

Cut the pork along the length, but not right through. Season both sides with salt and pepper and then arrange the basil leaves along the cut edge.

Spread the red pesto over the meat and then sprinkle with parmesan. Fold the two halves together and wrap with the Parma ham. Place in a gourmet oven dish, dot with butter and place in the oven.

After 15 minutes in the oven add the cream and the stock. Reduce the temperature to 140 °C and release the last burst of steam. If wished the sauce can be thickened with a little cornflour mixed with water.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	170–190 °C after 15 minutes: 140 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
2nd burst of steam	After another 10 minutes
Duration	35–45 minutes

Tips

To make your own red pesto:
Finely dice 200 g of bottled sundried tomatoes and a clove of garlic. Purée with 50 ml of olive oil, 1 tsp sugar and 2 tbsp breadcrumbs. Season to taste with a little oregano and Sambal Oelek.

Chinese pork steak

Serves 6

Ingredients

1500 g pork blade roast
3–4 cloves of garlic
2 walnut sized pieces of fresh ginger
3 tsp salt
3 tbsp soy sauce
3 tbsp honey
2 tbsp sherry
1 tsp five spice powder
2 tbsp hoi sin sauce
Sambal Oelek

Method

Finely dice the garlic, peel and grate the ginger. Mix well with the salt, soy sauce, honey, sherry, five spice powder and hoi sin sauce. Season to taste with Sambal Oelek.

Cut the meat in slices approx. 3 cm thick. Place in a plastic container with the marinade and cover with a tightly fitting lid. Place in the refrigerator to marinate for about 3–4 hours, turning from time to time.

Take the meat out of the marinade and place on a rack fitted above the universal tray. Place in a pre-heated oven and release the burst of steam immediately.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	/
Temperature	170 - 190 °C + pre-heating
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	20 - 30 minutes

Recipes

Spanish garlic rabbit

Serves 4

Ingredients

- 1 rabbit
- Salt
- Pepper
- 4 celery sticks
- 2 onions
- 2 tomatoes
- 4 cloves of garlic
- 5 tbsp olive oil
- 125 ml white wine
- 750 ml chicken stock
- 3 sprigs of thyme
- 4 bay leaves
- 100 g black olives, sliced

Method

Cut the rabbit into 6 pieces and season with salt and pepper. Dice the celery onions and tomatoes.

Place the meat in a gourmet oven dish and sear in olive oil on the hob. Add the tomatoes, celery, onions and garlic.

Deglaze with the white wine and add the chicken stock, thyme, bay leaves and sliced olives. Place in the oven and cook.

Remove the meat, sieve the sauce in a pan and simmer. Thicken with a little cornflour mixed in water if necessary.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150 - 170 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 20 minutes
Duration	70–80 minutes

Tips

This Spanish recipe is usually served with flat bread and a seasonal salad.

Lamb cutlets with a pistachio crust

Serves 4

Ingredients

2 racks of lamb (approx. 400 g each)
 50 g pistachio nuts, finely chopped
 50 g butter
 30 g breadcrumbs
 1/2 tsp thyme
 Salt
 Pepper
 2 tbsp olive oil

Method

Mix the finely chopped pistachios with the butter and breadcrumbs. Season with the thyme, salt and pepper.

Season the lamb with salt and pepper. Heat the olive oil in a pan and sear the lamb all over. Place the lamb on the universal tray with the meat side facing upwards. Spread the meat with the pistachio mixture, place in a pre-heated oven and inject the burst of steam immediately.

After cooking, wrap the meat in aluminium foil and leave to rest for about 10 minutes. Then divide into cutlets.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	1
Temperature	200 - 220 °C + pre-heating
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	15 minutes

If using the food probe, set the core temperature to 50 °C.

Recipes

Potato dumplings

Serves 4

Ingredients

- 125 g potatoes
- 1/2 cube of fresh yeast (21 g)
- 80 ml lukewarm milk
- 1/2 tsp salt
- 250 g strong white flour
- 20 g softened butter
- 1 egg
- 200 g cream cheese with herbs

For glazing

Milk

Method

Peel and cook the potatoes and pass them through a potato ricer whilst still warm, then leave to cool.

Dissolve the yeast in lukewarm milk. Then add potatoes, salt, flour, butter and egg and knead until you get a smooth pliable dough. Cover and place in the oven for about 30 minutes to prove using Conventional heat at 35 °C.

Form 12 small balls, make a small well in the side of each, fill with 1 tsp. cream cheese and press back together to seal.

Place the dumplings in a greased oven-proof dish (approx. 20 x 30 cm) with the seam underneath. Cover and place in the oven to prove for another 20-30 minutes using Conventional heat at 35 °C.

Brush the dumplings with milk and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150 - 170 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	35–45 minutes

Tips

Dumplings can also be used as a side dish with cut meat and salad.

Cheese soufflé

Serves 8

Ingredients

20 g butter
30 g plain flour
200 ml hot milk
Salt
Pepper, freshly ground
1 pinch of ground nutmeg
1 pinch of cayenne pepper
4 egg yolks
120 g cheese, grated
4 egg whites
Breadcrumbs
2 tbsp. grated Parmesan cheese
8 ramekins

Method

Melt the butter in a saucepan and stir in the flour (do not allow to brown). Stir in the milk and simmer gently for a further 5 minutes. Season with salt, pepper nutmeg and cayenne pepper.

Stir in the egg yolk a little at a time, then add the cheese.

Whisk the egg whites until stiff and carefully add it to the cooled cheese sauce.

Sprinkle the buttered ramekins with breadcrumbs and fill them with the soufflé mixture to within 1 cm of the top. Sprinkle with parmesan cheese.

Place the ramekins on the universal tray and bake in the preheated oven, releasing the burst of steam immediately.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	/
Temperature	180 - 200 °C + pre-heating
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	After placing food in oven
Duration	20–25 minutes

Tips

Serve the soufflés immediately to avoid them sinking.

Recipes

Spring pie

Serves 15

Ingredients

- 300 g puff pastry
- 1 red pepper
- 1 yellow pepper
- 3 spring onions
- 1 kg minced beef
- 1 garlic clove, finely chopped
- 100 g breadcrumbs
- 2 eggs
- Salt
- Pepper, freshly ground
- Paprika powder
- 2 tsp medium-hot mustard

For glazing

- 1 egg yolk
- Water

Method

Dice the peppers and slice the spring onions.

Mix the minced beef with the vegetables, garlic, breadcrumbs, eggs, spices and mustard.

Grease and line a loaf tin (approx 30 cm) with baking parchment. Roll the pastry out to approx. 45 x 50 cm. Line the tin with the pastry, leaving the same amount of pastry hanging over the sides all round. Add the minced beef mixture and press down firmly. Use the overlapping pastry to form a lid. Coat the edges with water and press the edges to seal the pie.

Cut 3 diamonds, approx. 3 x 3 cm in size out of the lid and use them to decorate the top of the pie.

Whisk the egg yolk with some water, brush over the pastry and bake.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	180 - 200 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	20 minutes after starting the programme
2nd burst of steam	After another 15 minutes
Duration	55 - 65 minutes

Cheese pie

Serves 8

Dough ingredients

1 cube of fresh yeast (42 g)
150 ml milk, lukewarm
150 g rye flour
200 g strong white flour
30 g butter
1/2 tsp salt
1/2 tsp sugar

Filling ingredients

300 g cheese
2 small red peppers
2 small red onions
2 tbsp chives, chopped
Salt
Coarsely ground black pepper
Chilli powder

Top with

4 tbsp pumpkin seeds

Method

Dissolve the yeast in lukewarm milk. Then add to the remaining ingredients and knead until you get a smooth pliable dough. Cover and place in the oven for about 45 minutes to prove using Conventional heat at 35 °C.

Finely dice the cheese. Dice the peppers and onions and mix with the chopped chives. Season with salt, pepper and chilli powder.

Roll the dough out onto a floured surface into a square (approx. 40 x 40 cm). Drape over a greased shallow square dish (approx. 20 x 20 cm) with the corners offset. Place the filling on the dough and fold the edges up over the filling, pressing them together to seal.

Cut 5 diamonds (approx. 3 x 3 cm) out of the lid and use them to decorate the top of the pie.

Brush with water and scatter pumpkin seeds over the top. Bake until golden and leave to stand for about 30 minutes before serving.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	3
Temperature	170–190 °C
Amount of water	approx. 300 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
3rd burst of steam	After another 10 minutes
Duration	50–60 minutes

Tips

The pie is very good as a starter or as a light main together with a salad.

Recipes

Tortellini, ham and rocket bake

Serves 6

Ingredients

- 125 g rocket
- 100 g air-dried ham
- 300 ml double cream
- 400 g sour cream
- Salt
- Pepper
- 800 g fresh Tortellini
- 300 g cherry tomatoes, halved
- 4 tbsp pine nuts, roasted
- 50 g Parmesan cheese, freshly grated
- 50 g Emmental cheese, coarsely grated

Method

Rinse and pat dry the rocket and chop up together with the ham. Mix the cream and sour cream and season with salt and pepper.

Mix the tortellini with the tomato halves, rocket and ham, place in a buttered casserole dish (approx. 20 x 30 cm) and top with the sauce.

Sprinkle with pine nuts and cheese and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	170–190 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	40 – 50 minutes

Mushroom cannelloni

Serves 4

Ingredients

16 cannelloni

Filling ingredients

1 onion

100 g cooked ham

350 g mushrooms

2 tbsp oil

75 g goat's cheese

100 g mozzarella

150 g cream cheese

Salt

Pepper

300 ml stock

100 g sour cream

Topping

100 g grated Cheddar cheese

Method

Dice the onion, ham and mushrooms. Heat the oil in a pan and gently fry the onion. Add the ham and continue to fry for a short while. Add the mushrooms and fry until there is no water in the pan.

Dice the goat's cheese and mozzarella. Add the cooled mushroom mixture and cream cheese and mix well. Season with salt and pepper to taste.

Fill the cannelloni with the mixture and place in a casserole (approx. 25 x 30 cm).

Mix the sour cream into the stock and pour over the cannelloni. Sprinkle with cheese and bake until golden.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	170–190 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	10 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	45–55 minutes

Tips

The cannelloni are easier to fill if you use a piping bag without a nozzle.

Recipes

Dumplings with plum compote

Serves 6

Ingredients

- 500 g strong white flour
- 1 cube of fresh yeast (42 g)
- 50 g sugar
- 250 ml milk, lukewarm
- 1 tsp ground cinnamon
- A pinch of salt
- 100 g softened butter
- 1 egg
- 120 g plum compote

For dusting

- 40 g icing sugar

Method

Dissolve the yeast in lukewarm milk. Then add to the flour, sugar, salt, butter and egg and knead until you get a smooth dough. Cover and place in the oven to prove for 20-30 minutes using Conventional heat at 35°C.

Make 12 balls from the dough. Open them enough to fill with 1 tbsp of plum compote and then seal them up. Place with the sealed edge underneath in a greased casserole dish (approx. 20 x 30 cm).

Cover and allow to prove in the oven for 20 minutes using Conventional heat at 35 °C. Bake until golden.

Dust with icing sugar and serve them with vanilla custard.

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	2
Temperature	150–170 °C
Amount of water	approx. 200 ml
Shelf level	2
1st burst of steam	5 minutes after starting the programme
2nd burst of steam	After another 10 minutes
Duration	35–45 minutes

Tips

As an alternative try filling the dumplings with a half a plum and dusting the tops with a little sugar before sealing the dumplings up.

Sweet cherry soufflé

Serves 8

Ingredients

Butter
50 g ground nuts
200 g sour cherries
2 egg yolks
80 g icing sugar
Pulp of 1 vanilla pod
250 g quark
20 g cornflour
2 egg whites

For dusting

40 g icing sugar

Settings

Oven function	Moisture plus 
Number/type of bursts of steam	<i>Auto</i>
Temperature	170–190 °C
Amount of water	approx. 150 ml
Shelf level	2
1st burst of steam	Automatic
Duration	20–30 minutes

Method

Grease the ramekins with butter and dust with the ground nuts.

Drain the cherries and spoon into the ramekins.

Beat the egg yolk with 60 g of icing sugar until light and fluffy. Stir in the vanilla pulp, quark and cornflour. Beat the egg white to stiff peaks with the rest of the icing sugar and carefully fold into the mixture.

Spoon the mixture into 8 ramekins (Ø 7–8 cm), arrange on a universal tray and then place in the pre-heated oven. Pour approx. 1 litre of warm water into the universal tray to make a bain marie then bake the ramekins.

Dust with icing sugar before serving.

Note for test institutes

Test food acc. to EN 60350

Test food	Tray / tin	Function	 [°C]	 ⁵	 [min]	Pre-heating
Drop cookies (8.4.1)	1 tray		140 ²⁾	2	30–40	No
	2 trays ¹⁾		140 ²⁾	1+3	30–45	No
	1 tray		160 ²⁾	2	15–33	Yes
Small cakes (8.4.2)	1 tray		150 ²⁾	2	25–35	No
	2 trays		150 ²⁾	2+4	25–35	Yes
	1 tray		160 ²⁾	3	20–30	Yes
Whisked sponge cake (8.5.1)	Springform Ø 26 cm ³⁾		180 ²⁾	2	22–30	No
	Springform Ø 26 cm ^{3) 4)}		150–180 ²⁾	2	20–45	Yes
Apple pie (8.5.2)	Springform Ø 20 cm ³⁾		160 ²⁾	2	80–105	No
	Springform Ø 20 cm ³⁾		180 ²⁾	1	80–95	No
Toast (9.1)	Rack		300	3	5–10	No
Grill beef burgers (9.2)	Rack on top of universal tray		300	4	1st side: 10–16 2nd side: 7–12	Yes, 5 minutes

 Fan plus /  Conventional heat /  Grill

 Temperature / ⁵ Shelf level /  Duration

- 1) Take the baking trays out of the oven early if the food is sufficiently browned before the specified duration has elapsed.
- 2) Do not use Rapid heat-up  during the heating-up phase.
- 3) Use a dark coloured, matt tin and place it on the rack.
- 4) In general, if a range of temperatures is given, it is best to select the lower temperature and to check the food after the shortest duration.

Energy efficiency class

The energy efficiency class is calculated in accordance with EN 50304/EN 60350.

Energy efficiency class: A+

Please observe the following advice when testing:

- Use the Gentle bake  programme for testing purposes.
- Set the oven lighting to "On for 15 seconds" (see "Settings").
- During testing make sure that only those accessories required for the test are in the oven cavity.
Do not use other accessories that might be available, such as FlexiClip runners or catalytic enamelled panels such as side panels or roof liners.

- When calculating the Energy efficiency class it is important to keep the oven door firmly closed.

Depending on test instruments used, the door seal function can be affected to a greater or lesser degree. This can have a negative influence on test results.

This can be compensated for by pressing on the door. Where necessary suitable technical measures can be used to assist. The door seal is not affected in normal everyday use.

Product data sheets

The data sheets apply to ovens described in this operating instruction manual.

Data sheet for domestic ovens

In acc. with delegated regulation (EU) No. 65/2014 and regulation (EU) No. 66/2014

MIELE	
Model name / identifier	H 6160 BP
Energy efficiency index/cavity (EEI_{cavity})	81,9
Energy efficiency class/cavity	
A+++ (most efficient) to D (least efficient)	A+
Energy consumption per cycle for each cavity in conventional mode	1,10 kWh
Energy consumption per cycle for each cavity in fan-forced convection mode	0,71 kWh
Number of cavities	1
Heat source(s) per cavity	Elektro
Volume of cavity	76 l
Mass of the appliance	47 kg

Data sheet for domestic ovens

In acc. with delegated regulation (EU) No. 65/2014 and regulation (EU) No. 66/2014

MIELE	
Model name / identifier	H 6260 BP
Energy efficiency index/cavity (EEI_{cavity})	81,9
Energy efficiency class/cavity	
A+++ (most efficient) to D (least efficient)	A+
Energy consumption per cycle for each cavity in conventional mode	1,10 kWh
Energy consumption per cycle for each cavity in fan-forced convection mode	0,71 kWh
Number of cavities	1
Heat source(s) per cavity	Elektro
Volume of cavity	76 l
Mass of the appliance	47 kg

United Kingdom

Miele Co. Ltd.
Fairacres, Marcham Road
Abingdon, Oxon, OX14 1TW
Customer Contact Centre Tel: 0330 160 6600
E-mail: mielecare@miele.co.uk
Internet: www.miele.co.uk

Australia

Miele Australia Pty. Ltd.
ACN 005 635 398
ABN 96 005 635 398
1 Gilbert Park Drive, Knoxfield, VIC 3180
Tel: 1300 464 353
Internet: www.miele.com.au

China

Miele (Shanghai) Trading Ltd.
1-3 Floor, No. 82 Shi Men Yi Road
Jing' an District
200040 Shanghai, PRC
Tel: +86 21 6157 3500, Fax: +86 21 6157 3511
E-mail: info@miele.cn, Internet: www.miele.cn

Miele (Hong Kong) Limited

41/F - 4101, Manhattan Place
23 Wang Tai Road
Kowloon Bay, Hong Kong
Tel: (852) 2610 1331, Fax: (852) 2610 1013
Email: mielehk@miele.com.hk

India

Miele India Pvt. Ltd.
Ground Floor, Copia Corporate Suites
Plot No. 9, Jasola
New Delhi - 110025
Tel: 011-46 900 000, Fax: 011-46 900 001
E-mail: customercare@miele.in, Internet: www.miele.in

Ireland

Miele Ireland Ltd.
2024 Bianconi Avenue
Citywest Business Campus, Dublin 24
Tel: (01) 461 07 10, Fax: (01) 461 07 97
E-Mail: info@miele.ie, Internet: www.miele.ie

Manufacturer: Miele & Cie. KG

Carl-Miele-Straße 29, 33332 Gütersloh, Germany

Miele

Malaysia

Miele Sdn Bhd
Suite 12-2, Level 12
Menara Sapura Kencana Petroleum
Solaris Dutamas No. 1, Jalan Dutamas 1
50480 Kuala Lumpur, Malaysia
Phone: +603-6209-0288
Fax: +603-6205-3768

New Zealand

Miele New Zealand Limited
IRD 98 463 631
Level 2, 10 College Hill
Freemans Bay, Auckland 1011, NZ
Tel: 0800 464 353
Internet: www.miele.co.nz

Singapore

Miele Pte. Ltd.
163 Penang Road
04 - 03 Winsland House II
Singapore 238463
Tel: +65 6735 1191, Fax: +65 6735 1161
E-Mail: info@miele.com.sg
Internet: www.miele.sg

South Africa

Miele (Pty) Ltd
63 Peter Place, Bryanston 2194
P.O. Box 69434, Bryanston 2021
Tel: (011) 875 9000, Fax: (011) 875 9035
E-mail: info@miele.co.za
Internet: www.miele.co.za

United Arab Emirates

Miele Appliances Ltd.
P.O. Box 11 47 82
Gold & Diamond Park, Sheikh Zayed Road
Building 6 / Offices Nos. 6-214 to 6-220
Dubai
Tel: +971-4-341 84 44
Fax: +971-4-341 88 52
E-Mail: info@miele.ae
Internet: www.miele.ae

H6160BP; H6260BP